

# **Textured White Frame with Mirage Bronze Lens**

Note: Fixture will come fully assembled with the frame and lens shown above.

Project:	Туре:
Prepared By:	Date:

	LED Info	
Constant Current	Watts:	14W
0.12A	Color Temp:	3000K (Warm)
0.07A	Color Accuracy:	98 CRI
0.06A	R9:	96
0.06A	L70 Lifespan:	50,000
14W	Lumens:	159
N/A	Efficacy:	11 LPW
	0.12A 0.07A 0.06A 0.06A 14W	Constant Current         Watts:           0.12A         Color Temp:           0.07A         Color Accuracy:           0.06A         R9:           0.06A         L70 Lifespan:           14W         Lumens:

# **Technical Specifications**

### Lightcloud

## **Lightcloud Controller Installed:**

Fixture, Zone, and plug-load control from one powerful device. Capable of switching, 0-10V dimming, power monitoring. Can also be used to extend the range of the Lightcloud mesh network. Attach to fixture, junction box, or electrical panel.

## Listings

#### **UL Listed:**

Suitable for damp locations. Recommended for indoor use only.

## **ADA Compliant:**

Meets ADA Requirements for wall-mounted luminaires.

## IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

## **LED Characteristics**

## Lifespan:

50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### LEDs

Long-life, High efficiency, micro-power, surface mount LEDs; binned and mixed for uniform light output and color

### **Light Loss Factor:**

0.33

## **Color Stability:**

LED color temperature is warrantied to shift no more than 200K in CCT over a 5 year period

## **Color Uniformity:**

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

## **Electrical**

#### **Dimming Driver:**

0 - 10V (at 120-277V), TRIAC and ELV (at 120V only)

## Driver:

Constant Current, Class 2, 120-277VAC, 50/60Hz, 350mA or 640mA

#### THD

19.9% at 120V, 21.7% at 277V

#### **Power Factor:**

96.4% at 120V, 85.7% at 277V

## Construction

## Housing:

Die-cast and extruded aluminum

#### Mounting:

Wall mount with junction box included

#### Lens

Acrylic lens with mirage bronze print. See for cleaning instructions.

## **Ambient Operating Temperature:**

-20°C (-4°F) to 40°C (104°F)

### **Green Technology:**

Mercury and UV-free. RoHS compliant components.

#### Finish:

Textured White using our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color

### Other

## Equivalency:


Equivalent to 60W Incandescent

# Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at

### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

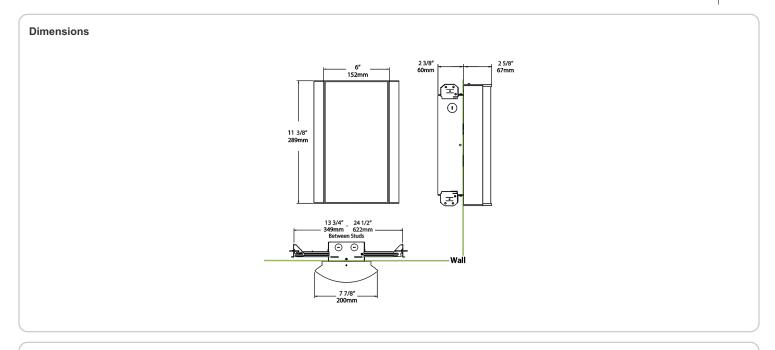

rdering Matrix							
Family	Lumen Package	CRI and CCT	Lens	Finish	Options		
HALV	10L	930	– MA	– W	/LC		
	10L = 1000lm / 14W 18L = 1800lm / 25W	940 = 90CRI, 4000K 935 = 90CRI, 3500K 930 = 90CRI, 3000K 927 = 90CRI, 2700K	F = Frosted (Standard) FG1 = Frosted with Grill Style #1 FG2 = Frosted with Grill Style #2 FG3 = Frosted with Grill Style #3 NL = Natural Leaves GL = Green Leaves TL = Toffee Leaves LW = Linen Hampton White LS = Linen Stone LH = Linen Harbor MS = Metallic Spun Silver MC = Metallic Spun Copper MG = Metallic Spun Gold CW = Crush Polar White CS = Crush Sedona MP = Mirage Platinum MA = Mirage Bronze	W = White K = Black S = Silver A = Antique Bronze SA = Satin Nickel CU = Copper	Blank = No Option  /E2 = Emergency Battery Backup  /MVS = Occupancy Sensor  /BL = Bi-Level Control  /LC = Lightcloud Controller  /MVS/E2 = Microwave Sensor w/ Emergency Battery  Backup  /BL/E2 = Bi-Level Control w/ Emergency Battery  Backup  /LC/E2 = Lightcloud Controller w/ Emergency Battery  Backup		