FZS250SFQT/PC





value from this compact 400 and 250 Watt HID flood.

Color: Bronze

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for ground mounting

Construction

Housing:

Precision die cast aluminum.

Reflector:

High quality anodized aluminum.

Lens:

Tempered shock resistant glass.

Lens Gasket:

Molded one-piece silicone in die cast retaining groove to remain in place during relamping.

Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

Project: Type: **Prepared By:** Date: Lamp Info **Ballast Info** Type: ED18 Type: CWA-HPF QT Watts: 250W 120V: 1.7/2.5A 208V: Shape/Size: N/A N/A

240V:

277V:

Input Watts:

Efficiency:

N/A

N/A

24,000

28,500

97 LPW

N/A

N/A

295W

85%

Base:

ANSI:

Hours:

Efficacy:

Lamp Lumens:

EPA: 1.3.

Weight: 32.8 lbs

Electrical

Socket:

Glazed porcelain 4kv pulse rated with nickel plated screw shell and spring contacts.

Quad Tap:

Fixture works with 120, 208, 240, and 277 volts.

Photocell:

Button Photocell 120V included. Photocell is only compatible with 120V.

Other

Patents:

Pat. D547,478.

Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.


GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

FZS250SFQT/PC



Dimensions

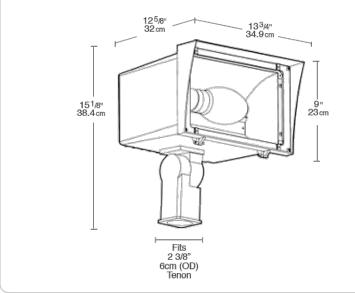

Features

Optional glare hood, wire guard or polycarbonate shield

Reflector designed for precise beam control

Stainless steel screws included

Long life lamp included

Supplied with 3' of STW cord

Rugged trunnion or slipfitter mounting

New 2" Integra hood to reduce light trespass and glare