# FZS400SFQT/PC2





New Integra Hood for Friendly Lighting. Awesome performance with quality and value from this compact 400 and 250 Watt HID flood.

Color: Bronze Weight: 33.2 lbs

Project:	Туре:
Prepared By:	Date:

Lamp Info		Ballast Info	
Type:	ED18	Type:	CWA-HPF QT
Watts:	400W	120V:	N/A
Shape/Size:	N/A	208V:	1.8/2.2A
Base:	N/A	240V:	1.5/1.9A
ANSI:	N/A	277V:	1.4/1.7A
Hours:	24,000	Input Watts:	464W
Lamp Lumens:	50,000	Efficiency:	86%
Efficacy:	108 LPW		

## **Technical Specifications**

## Listings

## **UL Listing:**

Suitable for wet locations. Suitable for ground mounting.

#### Construction

## Housing:

Precision die cast aluminum.

#### Reflector:

High quality anodized aluminum.

#### Lens

Tempered shock resistant glass.

### Lens Gasket:

Molded one-piece silicone in die cast retaining groove to remain in place during relamping.

## Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

## EPA:

1.3.

## **Electrical**

#### Socket

Glazed porcelain 4kv pulse rated with nickel plated screw shell and spring contacts.

## **Quad Tap:**

Fixture works with 120, 208, 240, and 277 volts.

## Photocell:

Button Photocell 277V included. Photocell is compatible with 208V-277V.

## Other

## **Buy American Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act

## Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

## **Trade Agreements Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

## GSA Schedule:


Suitable in accordance with FAR Subpart 25.4.

## Patents:

Pat. D547,478.

# FZS400SFQT/PC2



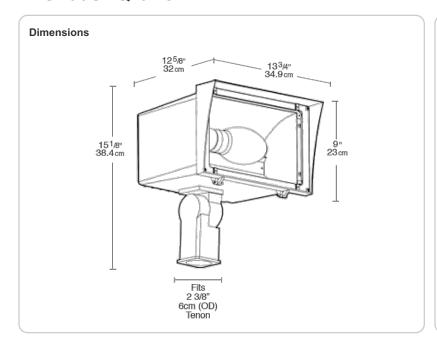

## **Features**

- Optional glare hood, wire guard or polycarbonate shield
- Reflector designed for precise beam control
- Stainless steel screws included
- Long life lamp included
- Supplied with 3' of STW cord
- Rugged trunnion or slipfitter mounting
- New 2" Integra hood to reduce light trespass and glare