
# HALVS18L930-MC-CU/LC

RAB Indoor

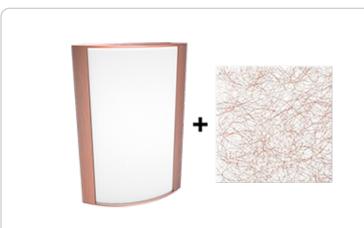

# **Copper Frame with Metallic Spun Copper Lens**

Note: Fixture will come fully assembled with the frame and lens shown above.

# **Technical Specifications**

#### Lightcloud

#### Lightcloud Controller Installed:

Fixture, Zone, and plug-load control from one powerful device. Capable of switching, 0-10V dimming, power monitoring. Can also be used to extend the range of the Lightcloud mesh network. Attach to fixture, junction box, or electrical panel.

### Listings

#### UL Listed:

Suitable for damp locations. Recommended for indoor use only.

#### **ADA Compliant:**

Meets ADA Requirements for wall-mounted luminaires.

## IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

## LED Characteristics

#### Lifespan:

50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### LEDs:

Long-life, High efficiency, micro-power, surface mount LEDs; binned and mixed for uniform light output and color

#### Light Loss Factor:

0.18

#### **Color Stability:**

LED color temperature is warrantied to shift no more than 200K in CCT over a 5 year period

#### **Color Uniformity:**

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Electrical

## **Dimming Driver:**

0 - 10V (at 120-277V), TRIAC and ELV (at 120V only)

#### Driver:

Constant Current, Class 2, 120-277VAC, 50/60Hz, 350mA or 640mA

#### THD:

12.6% at 120V, 16.1% at 277V

## **Power Factor:**

98.4% at 120V, 94.3% at 277V

# Construction

#### Housing:

Die-cast and extruded aluminum

#### Mounting:

Wall mount with junction box included

#### Lens:

Acrylic lens with metallic spun copper print. See for cleaning instructions.

#### Ambient Operating Temperature:

-20°C (-4°F) to 40°C (104°F)

#### Green Technology:

Mercury and UV-free. RoHS compliant components.

Type:

Date:

25W

94 CRI

50,000

15 LPW

91

400

3000K (Warm)

LED Info

Color Temp:

Color Accuracy:

L70 Lifespan:

Lumens:

Efficacy:

Watts:

R9:

#### Finish:

Constant Current

0.22A

0.13A

0.11A

0.1A

26W

97%

Luxuriously Electroplated Copper

## Other

Project:

**Driver Info** 

Type:

120V:

208V:

240V:

277V:

Input Watts:

Efficiency:

**Prepared By:** 

#### Equivalency :

Equivalent to 100W Incandescent

#### Warranty:


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at

### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

# HALVS18L930-MC-CU/LC

# Dimensions



# **Ordering Matrix**

Family L	umen Package.	CRI and CCT	Lens	Finish	Options
HALVS	18L	930	– MC –	- CU	/LC
	10L = 1000lm / 14W 18L = 1800lm / 25W	940 = 90CRI, 4000K 935 = 90CRI, 3500K 930 = 90CRI, 3000K 927 = 90CRI, 2700K	<ul> <li>F = Frosted (Standard)</li> <li>FG1 = Frosted with Grill Style #1</li> <li>FG2 = Frosted with Grill Style #2</li> <li>FG3 = Frosted with Grill Style #3</li> <li>NL = Natural Leaves</li> <li>GL = Green Leaves</li> <li>TL = Toffee Leaves</li> <li>TL = Toffee Leaves</li> <li>LW = Linen Hampton White LS = Linen Stone</li> <li>LH = Linen Harbor</li> <li>MS = Metallic Spun Silver</li> <li>MC = Metallic Spun Copper</li> <li>MG = Metallic Spun Gold</li> <li>CW = Crush Polar White</li> <li>CS = Crush Sedona</li> <li>MP = Mirage Platinum</li> <li>MA = Mirage Bronze</li> </ul>	W = White K = Black S = Silver A = Antique Bronze SA = Satin Nickel CU = Copper	Blank = No Option /E2 = Emergency Battery Backup /MVS = Occupancy Sensor /BL = Bi-Level Control /LC = Lightcloud Controller /MVS/E2 = Microwave Sensor w/ Emergency Battery Backup /BL/E2 = Bi-Level Control w/ Emergency Battery Backup /LC/E2 = Lightcloud Controller w/ Emergency Battery Backup