# WPTGSN100W





Heavy duty die cast aluminum housing with prismatic glass refractor. HPS and Metal Halide models available with 1/2" bottom and back conduit opening. Factory installed photocell optional. Lamp supplied.

Color: White Weight: 8.9 lbs

Project:	Туре:
Prepared By:	Date:

Type: 120V:	R-NPF 120V
120\/·	
120 4.	3.1/2.1A
208V:	N/A
240V:	N/A
277V:	N/A
Input Watts:	115W
Efficiency:	87%
	Efficiency.

# **Technical Specifications**

## Listings

## **UL Listing:**

Suitable for wet locations.

#### Construction

#### Reflector:

Die formed aluminum for wide light distribution. Moveable Glare Shield for field adjustable light control slanted slightly downward for more light on the job.

# Housing:

Heavy duty cast aluminum housing.

# Electrical

## **Ballast Housing:**

Stamped steel painted white.

## Other

#### **Back Plate:**

Heavy die cast aluminum. 1/2" bottom conduit knockout. Knockouts for mounting to 3" or 4" junction boxes.

### Patents:

The designs of RAB fixtures are protected under U.S., Canadian and international intellectual property laws.

#### **Buy American Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act

# Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

## **Trade Agreements Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

### **GSA Schedule:**

Suitable in accordance with FAR Subpart 25.4.


#### Optical

### Refractor:

Heavy prismatic glass refractor.

# WPTGSN100W



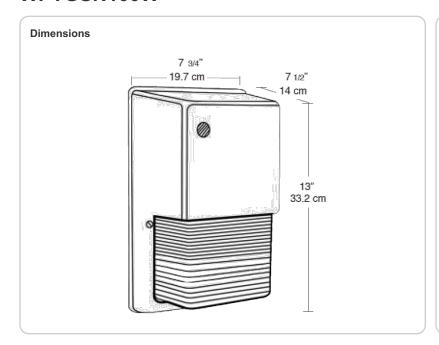

# **Features**

Heavy, die cast aluminum back plate with box mounting template

Shades work great with tallpacks!

1/2" bottom conduit knockout

Packaging has product features, ballast and lamp specifications

Lighting layout photometrics and installation instructions are available