



## Technical Specifications (continued)

### Other

#### Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

#### Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

#### Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

#### Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

#### GSA Schedule:


Suitable in accordance with FAR Subpart 25.4.

#### Optical

#### BUG Rating:

B1 U0 G2

## Dimensions

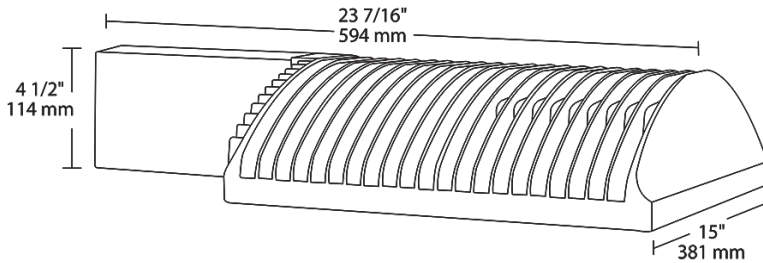

## Features

- 66% energy cost savings vs. HID
- 100,000-hour LED lifespan
- Type IV distribution
- 5-year warranty

## Ordering Matrix

| Family | Distribution  | Watts    | Mount      | Color Temp    | Finish    | Voltage                  | Photocell            | Dimming         | Bi-Level       |
|--------|---------------|----------|------------|---------------|-----------|--------------------------|----------------------|-----------------|----------------|
| ALED   |               |          |            |               |           |                          |                      |                 |                |
|        | 2T = Type II  | 360 =    | Blank =    | Blank = 5000K | Blank =   | Blank = 120-277V         | Blank = No Photocell | Blank = No      | Blank = No Bi- |
|        | 3T = Type III | 360W     | Arm        | (Cool)        | Bronze    | /480 = 480V (Only 360W & | /PC = 120V Button    | Dimming         | Level          |
|        | 4T = Type IV  | 260 =    | SF =       | Y = 3000K     | W = White | 260W)                    | /PC2 = 277V Button   | /D10 = Dimmable | /BL = Bi-Level |
|        |               | 260W     | Slipfitter | (Warm)        | RG = Gray |                          | /PCS = 120V Swivel   |                 |                |
|        |               | 150 =    |            | N = 4000K     |           |                          | /PCS2 = 277V Swivel  |                 |                |
|        |               | 150W     |            | (Neutral)     |           |                          | /PCT = 120-277V      |                 |                |
|        |               | 125 =    |            |               |           |                          | Twistlock            |                 |                |
|        |               | 125W     |            |               |           |                          | /PCS4 = 480V Swivel  |                 |                |
|        |               | 105 =    |            |               |           |                          | /PCT4 = 480V         |                 |                |
|        |               | 105W     |            |               |           |                          | Twistlock            |                 |                |
|        |               | 78 = 78W |            |               |           |                          |                      |                 |                |