



LED bollard with architectural quality and strength at an affordable price point. Cylindrical post with round head. Available in 12, 18 and 24 Watt versions that provide 90, 180, 270 and 360 degree lighting patterns.

Color: White

Weight: 11.4 lbs

|                     |              |
|---------------------|--------------|
| <b>Project:</b>     | <b>Type:</b> |
| <b>Prepared By:</b> | <b>Date:</b> |

| Driver Info  |                  | LED Info        |        |
|--------------|------------------|-----------------|--------|
| Type:        | Constant Current | Watts:          | 24W    |
| 120V:        | N/A              | Color Temp:     | 3000K  |
| 208V:        | N/A              | Color Accuracy: | 83 CRI |
| 240V:        | N/A              | L70 Lifespan:   | 100000 |
| 277V:        | N/A              | Lumens:         | 2120   |
| Input Watts: | 22W              | Efficacy:       | 98 LPW |
| Efficiency:  | N/A              |                 |        |

## Technical Specifications

### Listings

#### UL Listing:

Suitable for wet locations. Suitable for mounting within 4 ft. (1.2m) of the ground.

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.  
DLC Product Code: PGDT6PQ6

#### IESNA LM-79 & IESNA LM-80 Testing:

RAB LED fixtures have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

### Electrical

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

#### Driver:

Constant Current, Class 2, 480V, 50/60 Hz, 4kV Surge Protection, 720mA, 480V: 0.05A

#### THD:

9.7% at 480V

#### Power Factor:

83.7% at 480V

### LED Characteristics

#### LEDs:

Long-life, high-efficiency, surface mount LEDs.

#### Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Color Consistency:

5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color.

#### Color Stability:

LED color temperature is warranted to shift no more than 200K in CCT over a 5 year period.

#### Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017

### Optical

#### BUG Rating:

B2 U3 G2

### Construction

#### Cold Weather Starting:

Minimum starting temperature is -40°C (-40°F)

#### Thermal Management:

Cast aluminum Thermal Management system for optimal heat sinking. The BLEDR is designed for cool operation, maximum efficiency and long life by minimizing LED junction temperature.

#### Housing:

Die-cast aluminum with extruded aluminum post

#### Lens:

Frosted vandal resistant polycarbonate

#### Reflector:

Vacuum metalized polycarbonate

#### Mounting:

Four (4) anchor bolts provided for concrete pad mounting. Internal base support has leveling screws.

#### Gaskets:

High-temperature silicone gaskets seal out moisture gaskets seal out moisture

#### Anchor Bolt:

Anchor Bolt Dimension is available .

#### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color.

#### Green Technology:

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

### Other

#### Patents:

The design of BLEDR is protected by patents in US, Canada & China.

#### Replacement:

Replaces up to 50W Metal Halide.

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.


## Technical Specifications (continued)

### Other

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

### Dimensions

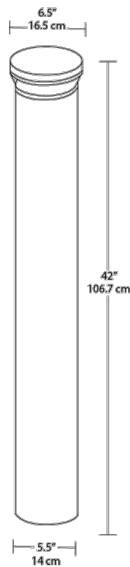

### Features

- Patent-pending base mount design for super sturdy installation
- Durable construction and vandal-resistant polycarbonate lens
- 3 configurations to provide 360°, 270°, 180° or 90° lighting pattern
- Precision-engineered optics deliver maximum downward lighting w/o glare
- Four leveling screws provided for easy installation
- 100,000-hour LED lifespan

### Ordering Matrix

| Family | Wattage  | Color Temp           | Finish         | Distribution                 | Voltage                      | Dimming                 | Backup                                       |
|--------|----------|----------------------|----------------|------------------------------|------------------------------|-------------------------|--|
| BLEDR  | 24       | Y                    | W              |                              | /480                         | /D10                    |  |
|        | 24 = 24W | Blank = 5000K (Cool) | Blank = Bronze | Blank = Standard             | Blank = No Option (120-277V) | Blank = None (Standard) | Blank = No Battery Backup                    |
|        | 18 = 18W | N = 4000K (Neutral)  | W = White      | 180 = 180 degrees (12W only) | /480 = 480V (24W only)       | /D10 = 0-10V Dimming    | /E = Battery Backup (24W only)               |
|        | 12 = 12W | Y = 3000K (Warm)     |                |                              |                              |                         | /EC = Battery Backup Cold Weather (24W only) |