## **DLED4R9YY**





Now, more is less. Economical retrofit downlights with more to offer. Available in standard or adjustable heads.

Color: White Weight: 0.5 lbs

Project:	Туре:
Prepared By:	Date:

Driver Info		LED Info	
Type:	Constant Current	Watts:	9W
120V:	0.078A	Color Temp:	2700K
208V:	N/A	Color Accuracy:	90 CRI
240V:	N/A	L70 Lifespan:	100000
277V:	N/A	Lumens:	662
Input Watts:	9W	Efficacy:	75 LPW
Efficiency:	N/A		

## **Technical Specifications**

Listings

**UL Listing:** 

Suitable for damp locations

**ENERGY STAR® V2.0:** 

This product is ENERGY STAR® Version 2.0 Certified.

IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

**Electrical** 

Driver:

Constant Current, Class 2, 50/60 Hz, 120V: 0.078A

Dimming:

TRIAC, ELV and 0-10V dimming compatibility.

THD:

27.2% at 120V

**Power Factor:** 

95.4% at 120V

**LED Characteristics** 

LEDs:

Multi-chip, high-output, long-life LEDs

Lifespan:

 $50,\!000\text{-}hour$  LED lifespan based on IES LM-80 results and TM-21 calculations.

Construction

Housing:

Precision, die-cast aluminum

Installation:

Jam clips for secure installation

Socket Adapter:

Edison 26 Medium Base Socket adapter

Lens:

Frosted acrylic lens

Finish:

Chip and fade resistant polyester powder coat finish

Green Technology:

Mercury and UV free. RoHS compliant components.


Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

## **DLED4R9YY**



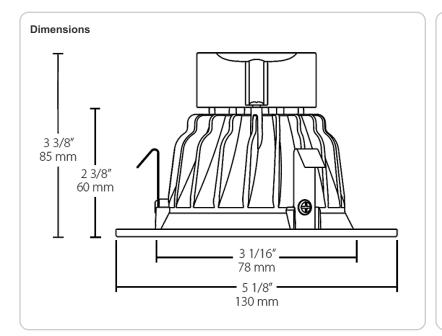

## Features

- Superior thermal management with heat-dissipating fins
- Specification-grade 90 CRI standard
- Edison E26 Medium Base socket adapter included
- 5 year no compromise warranty

Ordering Matrix									
Family	Color Temp	Size	Туре	Shape	Watts				
DLED	DLED	4		R	9				
	Y = 3000K (Warm)  YY = 2700K (Residential Warm)  YN = 3500K (Warm Neutral)	<b>4</b> = 4" <b>6</b> = 6"	Blank = Standard  A = Adjustable (11W in 4" & 14W in 6" only)	R = Round	9 = 9W 11 = 11W 14 = 14W				