## DLED6R9YN





Now, more is less. Economical retrofit downlights with more to offer. Available in standard or adjustable heads.

Color: White

### **Technical Specifications**

#### Listings

### **UL Listing:**

Suitable for damp locations

**ENERGY STAR® V2.0:** 

This product is ENERGY STAR® Version 2.0 Certified.

### IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

### Electrical

#### Driver:

Constant Current, Class 2, 50/60 Hz, 120V: 0.078A

### Dimming:

TRIAC, ELV and 0-10V dimming compatibility.

### THD:

26.21% at 120V

### Power Factor:

95.7% at 120V

LED Characteristics

### LEDs:

Weight: 0.8 lbs

Multi-chip, high-output, long-life LEDs

### Lifespan:

 $50,\!000\text{-}hour$  LED lifespan based on IES LM-80 results and TM-21 calculations.

### Construction

Housing:

Precision, die-cast aluminum

### Installation:

Torsion springs for secure installation

### Socket Adapter:

Edison 26 Medium Base Socket adapter

Project: Prepared By:		Туре:	
		Date:	
Driver Info Type:	Constant Current	LED Info Watts:	9W

12	20V:	0.078A	Color Temp:	3500K
20	)8V:	N/A	Color Accuracy:	91 CRI
24	IOV:	N/A	L70 Lifespan:	100000
27	77V:	N/A	Lumens:	786
In	put Watts:	9W	Efficacy:	87 LPW
Ef	ficiency:	N/A		

#### Lens:

Frosted acrylic lens

### Finish:

Chip and fade resistant polyester powder coat finish

### Green Technology:

Mercury and UV free. RoHS compliant components.

#### Other

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.


### Features

Superior thermal management with heat-dissipating fins

Specification-grade 90 CRI standard

Edison E26 Medium Base socket adapter included

5 year no compromise warranty

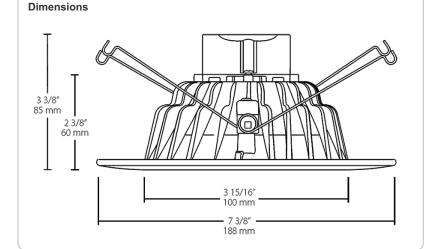

# DLED6R9YN



rdering Matrix					
Family	Color Temp	Size	Туре	Shape	Watts
DLED	DLED	6		R	9
	<b>Y</b> = 3000K (Warm)	<b>4</b> = 4"	Blank = Standard	R = Round	<b>9</b> = 9W
	YY = 2700K (Residential Warm) YN = 3500K (Warm Neutral)	<b>6</b> = 6"	A = Adjustable (11W in 4" & 14W in 6" only)		<b>11</b> = 11V <b>14</b> = 14V