# **GN2LED13NAC11B**





13 & 26 Watt Angled Cone Shade LED Gooseneck Luminaire designed to match the architecture of Main Street storefronts and building perimeters. LED Gooseneck Cone Shade with 35" Goose Arm Style 2.

Color: Black Weight: 14.0 lbs

Project:	Туре:
Prepared By:	Date:

Driver Info		LED Info	
Type:	Constant Current	Watts:	13W
120V:	0.3A	Color Temp:	4000K
208V:	0.3A	Color Accuracy:	86 CRI
240V:	0.3A	L70 Lifespan:	100000
277V:	0.15A	Lumens:	388
Input Watts:	15W	Efficacy:	25 LPW
Efficiency:	85%		
Efficiency:	85%		

# **Technical Specifications**

### Listings

### **UL Listing:**

Suitable for wet locations. Suitable for mounting within 1.2m (4ft) of the ground.

# IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

### **LED Characteristics**

### Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

### I FD

Single multi-chip, 13W high-output, long-life LED.

# Correlated Color Temp. (Nominal CCT):

4000K

# Color Stability:

LED color temperature is warrantied to shift no more than 200K in CCT over a 5 year period.

### **Color Uniformity:**

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2011.

## Construction

### Fixture:

The GN2LED13NAC11B comes with the GOOSE2B arm.

### **Thermal Management:**

Custom heat sink assembly in thermal contact with die-cast aluminum housing for superior heat sinking.

#### Housing:

Precision die-cast aluminum housing, lens frame and mounting plate.

#### Gaskets:

High Temperature Silicone

### Mounting:

Heavy-duty mounting arm with "O" ring seal and stainless steel screw.

### **Cold Weather Starting:**

The minimum starting temperature is -40°F/-40°C

### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals. Offers significantly improved gloss retention and resistance to color change.

### Green Technology:

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

# Electrical

### Driver:

Constant Current, Class 2, 100-277V, 50/60 Hz, 100-240VAC 0.3 - 0.15A, 277VAC 0.15A, THD  $\leq$ 20%, PF 97.5%.

# Surge Protection:

4kv

# Other

### Shades:

11" Angled Cone Shade offered.

### Equivalency:

The GNLED13 is equivalent in delivered lumens to 75W incandescent, 50W MH or 18W CFL.

#### California Title 24:

Goosenecks complies with 2013 California Title 24 building and electrical codes as a commercial outdoor non-pole-mounted fixture < 30 Watts when used with a photosensor control. Select catalog number PCS900(120V) or PCS900/277 to order a photosensor.

### Patents:

The design of the Gooseneck is protected by patents pending in US, Canada, China and Taiwan.

### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

### **Country of Origin:**

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

# **Buy American Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

### Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

### **Trade Agreements Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

# **GN2LED13NAC11B**




# **Technical Specifications (continued)**

Other

# **GSA Schedule:**

Suitable in accordance with FAR Subpart 25.4.

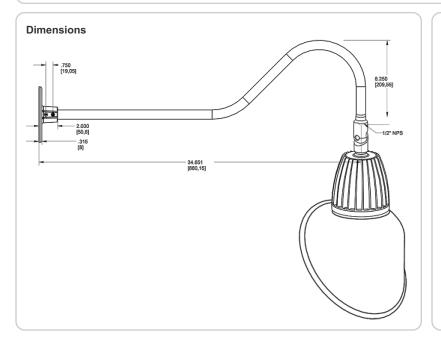

# **Features**

Adjustable 45° swivel joint

Superior heat sink

Die-cast aluminum housing

5 year LED warranty

dering Matrix						
Family	Watts	Color Temp	Reflector	Shade	ShadeSize	Finish
GN2LED	13	N		AC	11	В
	<b>13</b> = 13W	<b>Y</b> = 3000K (Warm)	Blank = Flood	AC = Angled Cone	<b>11</b> = 11"	<b>B</b> = Black
	<b>26</b> = 26W	<b>N</b> = 4000K (Neutral)	R = Rectangular		<b>Blank</b> = 15"	W = White
			S = Spot			A = Bronze
						S = Silver
						G = Hunter Gree
						YL = Yellow
						LB = Light Blue
						BL = Royal Blue
						<b>BWN</b> = Brown
						I = Ivory
						R = Red