

Project: Type: Prepared By: Date:



Features and Benefits

Energy efficient replacement for incandescent and halogen Small diameter reflectors

Constructed from durable materials which lowers risk of breakage

Rated for use in enclosed and open fixtures in dry or damp locations

Single optic and full face lens for precise beam angle control

 $Longer\,life span\,compared\,to\,legacy\,equivalents\,minimizes\,replacement\,and\,maintenance\,costs$

ENERGY STAR Compliant, UL Listed

Compatible with low voltage transformers (check compatibility list)

Technical Specifications

Performance

Product Type:

Small-Reflector

Input Wattage:

input wattage

4.5W

Lumens (Nominal):

350

Efficacy:

77 lm/W

Color Accuracy:

80

Color Temperature:

3000K

Dimmable:

Yes, down to 10%

L70 Lifespan:

25,000-Hour LED lifespan based on IES LM-70 results

Construction

Bulb Shape:

PAR16

711110

Enclosure Material:

Plastic

Housing Finish:

White

GU10

Base Type:

Beam Angle:

35°

Electrical

Power Factor:

>0.7

Input Voltage:

120V

Operating Frequency:

60 Hz

Operating Temperature:

-20°C-45°C



Technical Specifications (continued)

Other Compliance

Equivalency: UL Listed: Complies with Part 15 of the FCC Rules

50 Yes **Model Number:**

Technology EQ: Environment/Fixture Rating: R10060(GU10-4.5-830-35D-DIM)

Halogen Damp / Enclosed

Warranty (Years): Rohs:


3 years Mercury and UV free. RoHS-compliant components.

Minimum Compartment Size

Length x Width x Height [in]	Lamp Quantity	
10.43 x 4.33 x 2.76	1	

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	10	0	0	0
PALLET	3120	0	0	0

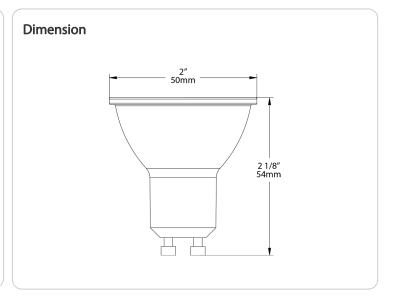

FCC: