GUS4-50YW/D10



50W

3000K

85 CRI

100000

108 LPW

5,444



The affordable LED GUS is designed to deliver general ambient lighting for surfacemount ceiling/wall or pendant mount applications. Diffusion lens delivers improved visual performance and a more refined look. Replaces traditional 4' linear fluorescent wraparound fixtures.

Color: White

Weight: 17.9 lbs

Technical Specifications

Listings

UL Listing:

Suitable for damp locations

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. DLC Product Code: PURSGBQQ

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy 'Lighting Facts' label.

LED Characteristics

Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

LEDs:

Long-life, high-efficiency surface mount LEDs

Color Stability:

LED Color temperature is warrantied to shift no more than 200K in CCT over a 5 year period.

Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2011.

Electrical

Driver:

Class 2, Constant Current, 100-277VAC, 50-60Hz, 4kV, 120V:0.43A, 0208V: 0.27A, 240V: 0.23A, 277V: 0.20A

Project:

Driver Info

Type:

120V:

208V:

240V:

277V:

Input Watts:

Efficiency:

Prepared By:

THD:

11.0% at 120V, 14.2% at 277V

Power Factor:

99.2% at 120V, 90.8% at 277V

Minimum Starting Temperature:

 0° to $40^{\circ}C$

Dimming Driver:

Driver includes dimming control for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

Construction

Housing:

Die-formed 22 gauge, cold-rolled, post-painted steel. Post painting improves durability of the finish and eliminates the sharp edges making handling and installation safer.

Mounting:

Surface mount. Can be mounted with chains or v-hooks by others.

Lens:

Constant Current

0.43A

0.27A

0.23A

0.20A

51W

99%

Acrylic lens with diffusion for enhanced optical performance

Type:

Date:

LED Info

Color Temp:

Color Accuracy:

L70 Lifespan:

Lumens:

Efficacy:

Watts

Reflector:

Aluminum with high-reflectance (91%) powder coat applied post production for a more durable finish

Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

Green Technology:

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

Other

Replacement:


GUS 50W replaces up to (3) F32T8

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

GUS4-50YW/D10



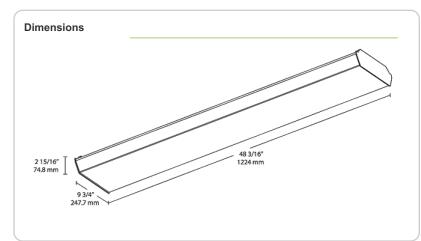

Features

Energy-efficient, maintenance-free LED wrap fixture

Multiple mounting options: surface, pendant or chain

High-reflectance white finish for optimal output

Diffusion wrap-around lens for smooth light distribution

0-10V dimming standard

100,000-Hour LED lifespan

Ordering Matrix

4				
4	50	Y	W	/D10
4 = 4 ft	36 = 36W	Blank = 5000K (Cool)	W = White	Blank = No Dimming
	50 = 50W	N = 4000K (Neutral)		/D10 = Dimmable
		YN = 3500K (Warm Neutral)		
		Y = 3000K (Warm)		
4	↓ = 4 ft		50 = 50W N = 4000K (Neutral) YN = 3500K (Warm Neutral)	50 = 50W N = 4000K (Neutral) YN = 3500K (Warm Neutral)