100-277V

0.9

<30%

<20%

Type:

Date:

LED Info

Flicker:

THDi:

4000K (Cool White) Power Factor:

Input Voltage:

100W

13,500

135 LPW


## HID-100-EX39-840-BYP-ΡΤ



## **Technical Specifications**

Listings	Base Type:	Other
UL Listed:	EX39, Mogul Base	Equivalent:
Yes	Dimmable:	400W HID Post Top
UL Classified:	No	Warranty:
Yes	Construction	5 years
Rohs:	Operating Temperature:	Optical
Yes	-20 - 40°C	Beam Angle:
CEC Status:	Bare Lamp Illuminated Length (inches):	360°
Lawful for sale in California	5.79"	Shipping Information
DLC Qualified:	MOL (inches):	Case Qty:
Yes	12.64"	6
DLC Listed:	MOD (inches):	Case Dimensions:
This product is on the Design Lights Consortium (DLC)	5.12"	19.8 x 14.41 x 14.21
Qualified Products List and is eligible for rebates from DLC Member Utilities.	Minimum Compartment Size (inches):	Pallet Quantity of Pieces:
DLC Product Code: P73BCGO4	Length: 9.84"	72
Description	Width: 9.84" Height: 12.79"	Pallet Dimensions:
Lamp Type:	LED Characteristics	30.79 x 41.57 x 47.36
HID		
Bulb Type:	Lifespan:	
Post Top	50,000-hour LED lifespan based on IES LM-70 results	
		)

## HID-100-EX39-840-BYP-PT

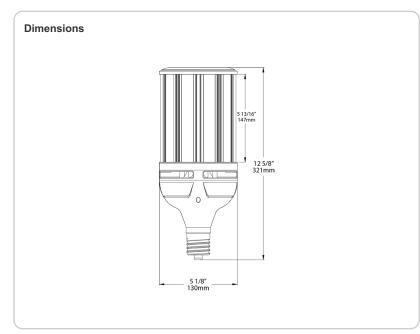

## Features

Replacement for Conventional HID Lamps

Water and dust resistant - ideal for outdoor fixtures

Thermal technology extends LED lifetime

Integrated Heat Sink Quickly Dissipates Heat without onboard fan

Internal Driver, Eliminates the Need for External Driver or Ballast

Includes 4kV Surge Protection

Instantly powers on without warm up time