
HID-40-H-EX39-850-BYP-WP

			Project:		Туре:	
			Prepared By:		Date:	
	nps for wallpa	Rcks. Water/dust resistant. Uses 76% less	Driver Info Watts: Color Temp: Lumens: Efficacy: Color Accuracy: L70 Accuracy:	40W 5000K (Daylight) 6,200 155 LPW 80 CRI 50,000	LED Info Input Voltage: Power Factor: Flicker: THDi:	100-277V 0.9 <30% <20%
energy than MH. 350° rotatable ba Color: W		Weight: 1.7 lbs				

	Бию туре:			
UL Listed:	Wall Pack	Lifespan:		
Yes	Base Type:	50,000-hour LED lifespan based on IES LM-70 results		
UL Classified:	EX39, Mogul Base	Other		
Yes	Dimmable:	Equivalent:		
FCC:	No	200W HID Wall Pack		
Yes	Construction	Warranty:		
Rohs:	Operating Temperature:	5 years		
Yes	-20 - 40°C	Optical		
CEC Status:	Bare Lamp Illuminated Length (inches):	Beam Angle:		
Lawful for sale in California	5.39"	180°		
DLC Qualified:	MOL (inches):	Shipping Information		
Yes	8.46"	Case Qty:		
DLC Listed:	MOD (inches):	12		
This product is on the Design Lights Consortium (DLC)	3.62"	Case Dimensions:		
Qualified Products List and is eligible for rebates from DLC Member Utilities.	Minimum Compartment Size (inches):	16.73 x 12.68 x 10.75		
DLC Product Code: PHKOQAG7	Length: 7.99"	Pallet Quantity of Pieces:		
Description	Width: 7.99"	144 Pallet Dimensions:		
Lamp Type:	Height: 11.02"			
HID		27.32 x 35.43 x 36.97		

HID-40-H-EX39-850-BYP-WP

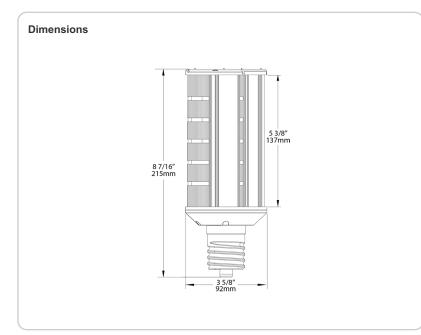

Features

Uses 76% less energy than traditional lamps

Integral Driver, Eliminates the Need for External Driver or Ballast

Includes 4kV Surge Protection

- 350 $^{\circ}$ rotatable base, directs light where needed
- Integrated Heat Sink Quickly Dissipates Heat
- Suitable for Use in Fully Enclosed Fixture
- Water and dust resistant, ideal for outdoor use

Environmentally friendly: No Mercury Used