



Stop overlight and start cutting your utility bill with the Lightcloud Daylight. This solar-powered wireless sensor can dim or shut off electric lighting when sunlight is sufficient to achieve your desired lighting level.

Color: White

Weight: 1.4 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

## Technical Specifications

### Listings

#### UL Listing:

Indoor use only.

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

### Electrical

#### Input Voltage:

120-277 VAC

#### Frequencies:

47-63 Hz

#### Current Draw:

6 mA @ 120VAC

### Construction

#### Operating Temperature Range:

-10°C to 40°C

#### Storage Temperature Range:

-40°C to 85°C

#### Maximum Relative Humidity:

95%

#### Supported Mounting Location:

Must be exposed to sunlight, ideally direct, and within wireless range of another Lightcloud device.

### Wireless Range

#### Line of Sight:

1,000 feet

#### Obstructions:


100 feet

### Other

#### Warranty:

10-year full hardware warranty with 100% repair/replacement coverage for all properly installed devices.

## Dimensions

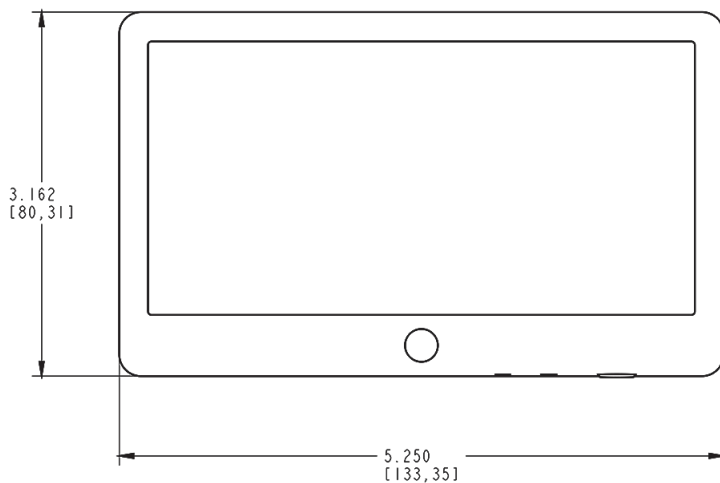

## Features

Easy setup - simply power on, confirm device connectivity and call 844-LIGHTCLOUD

Wireless Sensing & Configuration

Cloud-based management - no software to install or maintain

Ambient Light Sensor

Innovative Self-Powered Design

No Batteries