
LSLFLEDA





Project: Prepared By:		Туре:	
		Date:	
Driver Info		LED Info	
Туре:	Constant Current	Watts:	0W
	N/A	Color Temp:	N/A
120V:			
	N/A	Color Accuracy:	N/A
120V: 208V: 240V:	N/A N/A	Color Accuracy: L70 Lifespan:	N/A N/A
208V: 240V:			
208V:	N/A	L70 Lifespan:	N/A

Technical Specifications		
Listings	Finish:	Patents:
UL Listing:	Our environmentally friendly polyester powder coatings	The design of the LSFLED is protected by patents
Suitable for wet locations. Suitable for ground mounting.	are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.	pending in US, Canada, China, Taiwan and Mexico
Construction	Optical	
Lens:	NEMA Туре:	
Microprismatic diffusion lens for smooth and even light	Fixture has a NEMA Type 3H x 3V.	
distribution.	Other	
Housing:	Compatibility:	
Precision die-cast aluminum.	Compatible with	

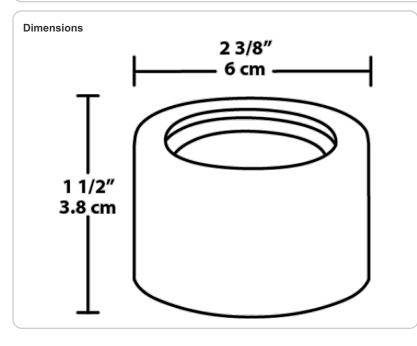

Features

Microprismatic diffusion lens for smooth and even light distribution

Precision die-cast aluminum housing

5-Year warranty

LSLFLEDA



Family Watts Finish LSLFLED Image: State of the sta