LSLFLEDBR





Project:	Туре:
Prepared By:	Date:

Driver Info		LED Info	
Type:	Constant Current	Watts:	0W
120V:	N/A	Color Temp:	N/A
208V:	N/A	Color Accuracy:	N/A
240V:	N/A	L70 Lifespan:	N/A
277V:	N/A	Lumens:	N/A
Input Watts:	0W	Efficacy:	N/A
Efficiency:	N/A		

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for ground mounting.

Construction

Lens:

Microprismatic diffusion lens for smooth and even light distribution.

Housing:

Precision die cast brass housing.

Finish:

Not clear coated so it will naturally patina over time.

Optical


NEMA Type:

Spot lens has a NEMA Type 3H x 3V.

Other

Compatibility:

Compatible with

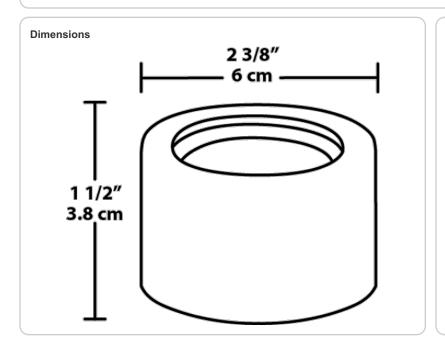

Features

Microprismatic diffusion lens for smooth and even light distribution

Precision die-cast aluminum housing

5-Year warranty

LSLFLEDBR



Ordering Matrix				
Family	Watts	Finish		
LSLFLED				
	Blank = 5W	A = Bronze		
	8 = 8W	W = White		
		B = Black		
		VG = Verde Green		
		BR = Brass		