
## LSLFLEDVG





Project: Prepared By: Driver Info		Туре:	
		Date:	
		LED Info	
Гуре:	Constant Current	Watts:	0W
120V:	N/A	Color Temp:	N/A
208V:	N/A	Color Accuracy:	N/A
240V:	N/A	L70 Lifespan:	N/A
277V:	N/A	Lumens:	N/A
	0W	Efficacy:	N/A
nput Watts:			

Technical Specifications			
Listings	Finish:	Patents:	
UL Listing:	Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.	The design of the LSFLED is protected by patents	
Suitable for wet locations. Suitable for ground mounting.		pending in US, Canada, China, Taiwan and Mexico.	
Construction	Optical		
Lens:	NEMA Туре:		
Microprismatic diffusion lens for smooth and even light	Fixture has a NEMA Type 3H x 3V.		
distribution.	Other		
Housing:	Compatibility:		
Precision die-cast aluminum.	Compatible with		

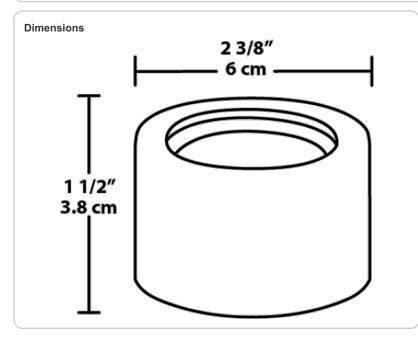

## Features

Microprismatic diffusion lens for smooth and even light distribution

Precision die-cast aluminum housing

5-Year warranty

## LSLFLEDVG



## Family Watts Finish LSLFLED Blank = 5W A = Bronze 8 = 8W W = White B = Black B = Black B = Black B = Black B = Brass BR = Brass