
# NDTRIM3S40A-M-TL



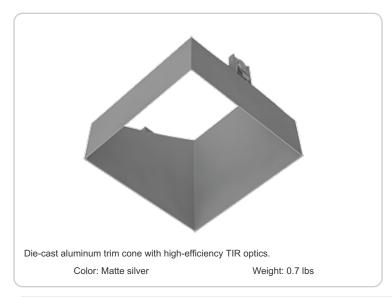

Project:	Туре:
Prepared By:	Date:

Driver Info		LED Info	
Type:	Sold Separately	Watts:	OW
120V:	See Rough-in*	Color Temp:	N/A
208V:	See Rough-in*	Color Accuracy:	N/A
240V:	See Rough-in*	L70 Lifespan:	See Rough-In*
277V:	See Rough-in*	Lumens:	N/A
Input Watts:	0W	Efficacy:	N/A
Efficiency:	N/A		

# **Technical Specifications**

# Listings

# **UL Listing:**

Suitable for damp locations

#### Optical

#### Photometrics:

Photometrics are based on prorated reports. Contact the RAB Lighting Design department for the most up-to-date data.

#### Optics:

High-efficiency TIR optics available as a trimless adjustable 40° beam with 40° vertical adjustment and 360° rotation downlight. Optic and trim cone included.

#### Construction

## **Trim Component:**

This component must be ordered with New Construction Rough-In in order to make a complete fixture.

#### **Trim Cone:**

Matte silver square trim cone, die-cast aluminum.

#### Trim:

Trimless

#### Installation:

Nailer bar and butterfly brackets included; C-channels optional for acoustic tiles

#### Green Technology:

Mercury and UV free. RoHS compliant components.

#### Other

## **Aperture Size:**

3" Trim Module

## Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

#### **Country of Origin:**

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

# **Buy American Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

#### Recovery Act (ARRA) Compliant:


This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

#### **GSA Schedule:**

Suitable in accordance with FAR Subpart 25.4.

# NDTRIM3S40A-M-TL



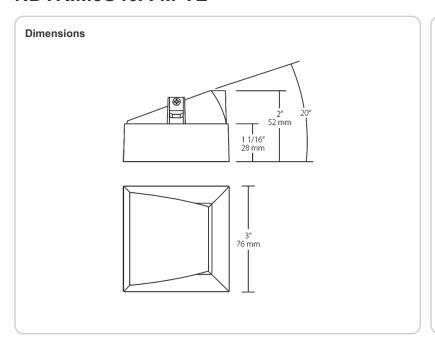

# Features

Durable die-cast aluminum

High-efficiency TIR optics

Optic and trim included

Ordering Matrix					
Family	Size	Shape	Optics	Color	Trim
NDTRIM	3	S	40A	M	TL
	<b>3</b> = 3"	S = Square	80 = 80° Downlight	B = Black	Blank = Trimmed
			$50 = 50^{\circ}$ Downlight	W = White	TL = Trimless
			<b>40A</b> = 40° Adjustable	M = Matte Silver	
			<b>20A</b> = 20° Adjustable		
			W = Wall Washer		