
NDTRIM3S40A-W-TL



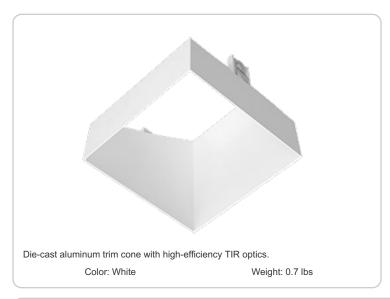

| Project: | Туре: |
|--------------|-------|
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|--------------|-----------------|-----------------|---------------|
| Type: | Sold Separately | Watts: | 0W |
| 120V: | See Rough-in* | Color Temp: | N/A |
| 208V: | See Rough-in* | Color Accuracy: | N/A |
| 240V: | See Rough-in* | L70 Lifespan: | See Rough-In* |
| 277V: | See Rough-in* | Lumens: | N/A |
| Input Watts: | 0W | Efficacy: | N/A |
| Efficiency: | N/A | | |

Technical Specifications

Listings

UL Listing:

Suitable for damp locations

Optical

Photometrics:

Photometrics are based on prorated reports. Contact the RAB Lighting Design department for the most up-to-date data.

Optics:

High-efficiency TIR optics available as a trimless adjustable 40° beam with 40° vertical adjustment and 360° rotation downlight. Optic and trim cone included.

Construction

Trim Component:

This component must be ordered with New Construction Rough-In in order to make a complete fixture.

Trim Cone:

White square trim cone, die-cast aluminum.

Trim:

Trimless

Installation:

Nailer bar and butterfly brackets included; C-channels optional for acoustic tiles

Green Technology:

Mercury and UV free. RoHS compliant components.

Other

Aperture Size:

3" Trim Module

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act

Recovery Act (ARRA) Compliant:


This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

NDTRIM3S40A-W-TL



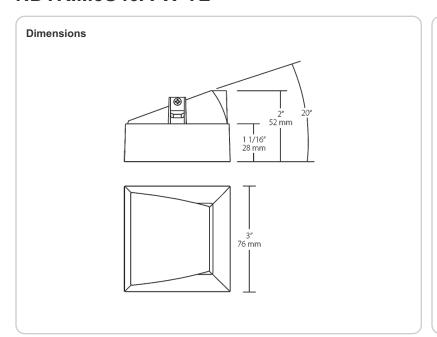

Features

Durable die-cast aluminum

High-efficiency TIR optics

Optic and trim included

| Ordering Matrix | | | | | |
|-----------------|---------------|------------|-----------------------------|------------------|-----------------|
| Family | Size | Shape | Optics | Color | Trim |
| NDTRIM | 3 | S | 40A | W | TL |
| | 3 = 3" | S = Square | 80 = 80° Downlight | B = Black | Blank = Trimmed |
| | | | 50 = 50° Downlight | W = White | TL = Trimless |
| | | | 40A = 40° Adjustable | M = Matte Silver | |
| | | | 20A = 20° Adjustable | | |
| | | | W = Wall Washer | | |