0.9

<30%

N/A



Project:		Type:	
Prepared By:		Date:	
Driver Info Watts: 11W		LED Info Input Voltage:	120V

5000K (Daylight) Power Factor:

Flicker:

THDi:

Technical Specifications			
Listings	Description	Warranty:	
UL Listed:	Dimmable:	4 years	
Yes	Yes	Optical	
FCC:	Lamp Type:	Beam Angle:	
Yes	Par	25°	
T20:	Bulb Type:	Shipping Information	
Complies with CEC Title 20	PAR30L	Case Dimensions:	
T24:	Base Type:	12.4 x 8.27 x 7.09	
Complies with Title 24 Appendix JA8	E26, Medium Screw Base	Pallet Quantity of Pieces:	
Rohs:	Material:	600	
Yes	Plastic	Pallet Dimensions:	
ENERGY STAR V2.0:	LED Characteristics	45.47 x 37.2 x 35.43	
This product is ENERGY STAR® Version 2.0 Certified	<b>Lifespan:</b> 40,000-hour LED lifespan based on IES LM-70 results	Construction	
CEC Status:		MOL:	
Lawful for sale in California	Other	4.53"	
	Equivalent:	MOD:	
	75W Halogen PAR30L	3.74"	

Color Temp:

Color Accuracy: 90 CRI L70 Accuracy:


Lumens:

Efficacy:

900

82 LPW

40,000

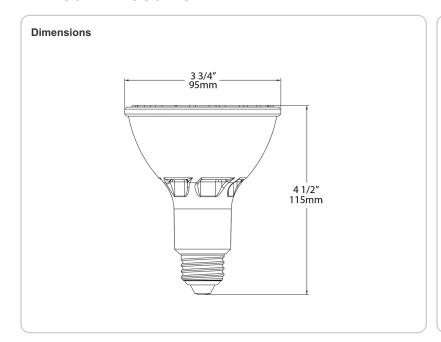

## **Features**

Dimmable LED with a 40,000-hour lifespan: 90 CRI High-output models available

Produces rich and vibrant colors

Save up to 85% on energy

High output models available

Use in enclosed or open fixtures

Shatterproof