

Project:	Type:
Prepared By:	Date:
Driver Info	LED Info

Driver Info

Watts: 9W 3000K (Warm Color Temp: White)

Lumens: 950 Efficacy: 106 LPW Color 82 CRI Accuracy: L70 Accuracy: 50,000

Input Voltage: Ballast Dependent Power Factor: Ballast Dependent

Flicker: N/A THDi: <20%

Technical Specifications

Listings

UL Listed:

Yes

FCC: Yes

Rohs:

Yes **CEC Status:**

Lawful for sale in California

DLC Qualified:

Yes

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC Product Code: PLZL4JVYQPK8

Description

Lamp Type:

PLC/T Compacts

Bulb Type:

PLC/T

Base Type:

G24q, 4 Pin

Dimmable:

No

Length:

Н

Material:

Glass

LED Characteristics

Installation Type:

Type A

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

MOL (inches):

6.65"

MOD (inches):

1.1"

Other

Equivalent:

26W Fluorescent PLC/T

Warranty:

5 years

Shipping Information

Case Qty:


Case Dimensions:

6.5 x 4.92 x 7.09

Pallet Quantity of Pieces:

Pallet Dimensions:

47.24 x 39.37 x 49.61

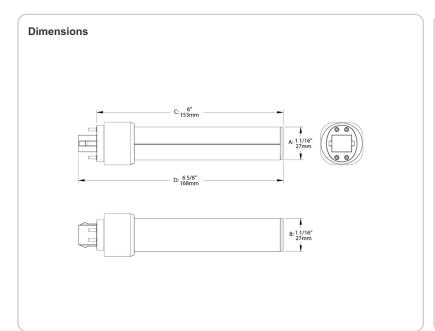

Features

Replacement for Conventional Fluorescent Lamps

Approximately 40% More Energy Efficient than Conventional Pin-Base CLF's with G24q base

Instant on, no flicker or hum

Ballast Compatible, works on existing electronic ballasts no need to rewire

111+ Lumens per watt

Environmentally friendly: No Mercury Used