



Replace cluster and 3U-pin base compact fluorescent lamps.
Color: White Weight: 0.3 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Watts:	9W	Input Voltage:	120-277V
Color Temp:	3500K (Neutral White)	Power Factor:	0.9
Lumens:	950	Flicker:	N/A
Efficacy:	106 LPW	THDi:	<20%
Color	82 CRI		
Accuracy:			
L70 Accuracy:	50,000		

Technical Specifications

Listings

UL Recognized:
Yes
UL Classified:
Yes
FCC:
Yes
Rohs:
Yes
CEC Status:
Lawful for sale in California

Description


Lamp Type:
PLC/T Compacts
Bulb Type:
PLC/T
Base Type:
G24d, 2 Pin

Dimmable:
No
Length:
H
Material:
Glass
LED Characteristics
Installation Type:
Type B
Lifespan:
50,000-hour LED lifespan based on IES LM-70 results
Construction
Operating Temperature:
-20 - 40°C
MOL (inches):
6.65"
MOD (inches):
1.1"

Other

Equivalent:
26W Fluorescent PLC/T
Warranty:
5 years
Shipping Information
Case Qty:
12
Case Dimensions:
6.5 x 4.92 x 7.09
Pallet Quantity of Pieces:
3384
Pallet Dimensions:
47.24 x 39.37 x 49.61

Dimensions

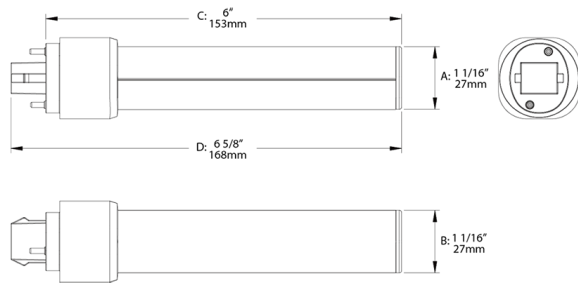

Features

Replacement for Conventional Fluorescent Lamps

Approximately 40% More Energy Efficient than Conventional Pin-Base CLF's with G24q base

Instant on, no flicker or hum

Bypass ballast to eliminate maintenance costs or use existing ballast

111+ Lumens per watt

Environmentally friendly: No Mercury Used