



Replace cluster and 3U-pin base compact fluorescent lamps.

Color: White

Weight: 0.3 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Watts:	9W	Input Voltage:	120-277V
Color Temp:	4000K (Cool White)	Power Factor:	0.9
Lumens:	1,000	Flicker:	N/A
Efficacy:	111 LPW	THDi:	<20%
Color Accuracy:	82 CRI		
L70 Accuracy:	50,000		

Technical Specifications

Listings

UL Recognized:

Yes

UL Classified:

Yes

FCC:

Yes

Rohs:

Yes

CEC Status:

Lawful for sale in California

Description

Lamp Type:

PLC/T Compacts

Bulb Type:

PLC/T

Base Type:

G24d, 2 Pin

Dimmable:

No

Length:

H

Material:

Glass

LED Characteristics

Installation Type:

Type B

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

MOL (inches):

6.65"

MOD (inches):

1.1"

Other

Equivalent:

26W Fluorescent PLC/T

Warranty:

5 years

Shipping Information

Case Qty:

12

Case Dimensions:

6.5 x 4.92 x 7.09


Pallet Quantity of Pieces:

3384

Pallet Dimensions:

47.24 x 39.37 x 49.61

Dimensions

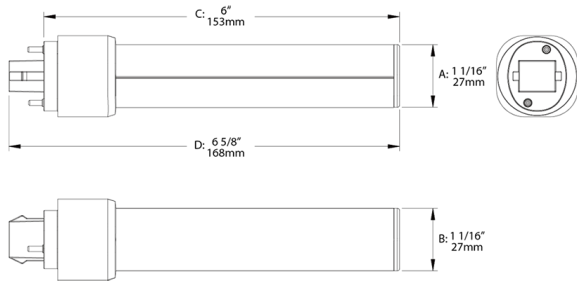

Features

Replacement for Conventional Fluorescent Lamps

Approximately 40% More Energy Efficient than Conventional Pin-Base CLF's with G24q base

Instant on, no flicker or hum

Bypass ballast to eliminate maintenance costs or use existing ballast

111+ Lumens per watt

Environmentally friendly: No Mercury Used