



Replace cluster and 3U-pin base compact fluorescent lamps.

Color: White

Weight: 0.3 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Watts:	9W	Input Voltage:	120-277V
Color Temp:	5000K (Daylight)	Power Factor:	0.9
Lumens:	1,000	Flicker:	N/A
Efficacy:	111 LPW	THDi:	<20%
Color Accuracy:	82 CRI		
L70 Accuracy:	50,000		

**Technical Specifications**

**Listings**

**UL Recognized:**

Yes

**UL Classified:**

Yes

**FCC:**

Yes

**Rohs:**

Yes

**CEC Status:**

Lawful for sale in California

**Description**

**Lamp Type:**

PLC/T Compacts

**Bulb Type:**

PLC/T

**Base Type:**

G24d, 2 Pin

**Dimmable:**

No

**Length:**

H

**Material:**

Glass

**LED Characteristics**

**Installation Type:**

Type B

**Lifespan:**

50,000-hour LED lifespan based on IES LM-70 results

**Construction**

**Operating Temperature:**

-20 - 40°C

**MOL (inches):**

6.65"

**MOD (inches):**

1.1"

**Other**

**Equivalent:**

26W Fluorescent PLC/T

**Warranty:**

5 years

**Shipping Information**

**Case Qty:**

12

**Case Dimensions:**

6.5 x 4.92 x 7.09


**Pallet Quantity of Pieces:**

3384

**Pallet Dimensions:**

47.24 x 39.37 x 49.61

## Dimensions

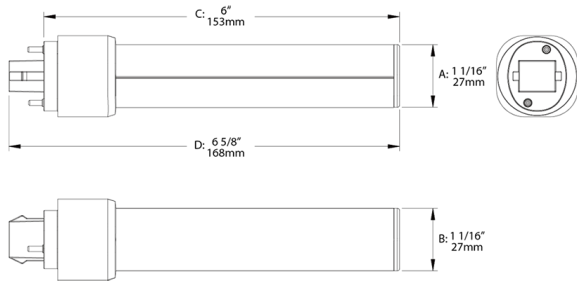

## Features

Replacement for Conventional Fluorescent Lamps

Approximately 40% More Energy Efficient than Conventional Pin-Base CLF's with G24q base

Instant on, no flicker or hum

Bypass ballast to eliminate maintenance costs or use existing ballast

111+ Lumens per watt

Environmentally friendly: No Mercury Used