



Replace cluster and 3U-pin base compact fluorescent lamps.

Color: White

Weight: 0.3 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

<b>Driver Info</b>	<b>LED Info</b>
Watts: 9W	Input Voltage: Ballast Dependent
Color Temp: 3000K (Warm White)	Power Factor: Ballast Dependent
Lumens: 950	Flicker: N/A
Efficacy: 106 LPW	THDi: <20%
Color Accuracy: 82 CRI	
L70 Accuracy: 50,000	

**Technical Specifications**

**Listings**

**UL Listed:**

Yes

**FCC:**

Yes

**Rohs:**

Yes

**CEC Status:**

Lawful for sale in California

**DLC Qualified:**

Yes

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC Product Code: PLZL4JVYQPK8

**Description**

**Lamp Type:**

PLC/T Compacts

**Bulb Type:**

PLC/T

**Base Type:**

G24q, 4 Pin

**Dimmable:**

No

**Length:**

V

**Material:**

Glass

**LED Characteristics**

**Installation Type:**

Type A

**Lifespan:**

50,000-hour LED lifespan based on IES LM-70 results

**Construction**

**Operating Temperature:**

-20 - 40°C

**MOL (inches):**

4.69"

**MOD (inches):**

1.85"

**Other**

**Equivalent:**

26W Fluorescent PLC/T

**Warranty:**

5 years

**Shipping Information**

**Case Qty:**

12

**Case Dimensions:**

8.07 x 6.1 x 5.12


**Pallet Quantity of Pieces:**

2880

**Pallet Dimensions:**

47.24 x 39.37 x 47.64

## Dimensions

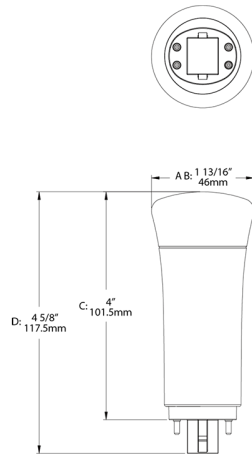

## Features

Replacement for Conventional Fluorescent Lamps

Approximately 40% More Energy Efficient than Conventional Pin-Base CLF's with G24q base

Instant on, no flicker or hum

Ballast Compatible, works on existing electronic ballasts no need to rewire

111+ Lumens per watt

Environmentally friendly: No Mercury Used