



Replace cluster and 3U-pin base compact fluorescent lamps.

Color: White

Weight: 0.3 lbs

Project:	Type:
Prepared By:	Date:

Driver Info	LED Info
Watts: 9W	Input Voltage: Ballast Dependent
Color Temp: 5000K (Daylight)	Power Factor: Ballast Dependent
Lumens: 1,000	Flicker: N/A
Efficacy: 111 LPW	THDi: <20%
Color Accuracy: 82 CRI	
L70 Accuracy: 50,000	

Technical Specifications

Listings

UL Listed:

Yes

FCC:

Yes

Rohs:

Yes

CEC Status:

Lawful for sale in California

DLC Qualified:

Yes

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC Product Code: PLXB2K0AYNNI

Description

Lamp Type:

PLC/T Compacts

Bulb Type:

PLC/T

Base Type:

G24q, 4 Pin

Dimmable:

No

Length:

V

Material:

Glass

LED Characteristics

Installation Type:

Type A

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

MOL (inches):

4.69"

MOD (inches):

1.85"

Other

Equivalent:

26W Fluorescent PLC/T

Warranty:

5 years

Shipping Information

Case Qty:

12

Case Dimensions:

8.07 x 6.1 x 5.12


Pallet Quantity of Pieces:

2880

Pallet Dimensions:

47.24 x 39.37 x 47.64

Dimensions

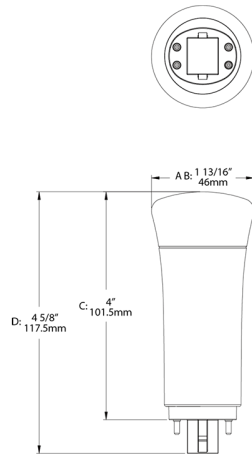

Features

Replacement for Conventional Fluorescent Lamps

Approximately 40% More Energy Efficient than Conventional Pin-Base CLF's with G24q base

Instant on, no flicker or hum

Ballast Compatible, works on existing electronic ballasts no need to rewire

111+ Lumens per watt

Environmentally friendly: No Mercury Used