



High quality polycarbonate PL floodlight. Supplied with one, two or three 13 Watt twin tube compact fluorescent lamps. Adjustable swivel mounting arm with 1/2" thread. Lamps supplied.

Color: Bronze

Weight: 2.6 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Lamp Info		Ballast Info	
Type:	13W Twin	Type:	NPF 120V
Watts:	26W	120V:	N/A
Shape/Size:	N/A	208V:	N/A
Base:	N/A	240V:	N/A
ANSI:	N/A	277V:	N/A
Hours:	10,000	Input Watts:	0W
Lamp Lumens:	1,800		
Efficacy:	N/A		

**Technical Specifications**

**Listings**

**UL Listing:**

Suitable for wet locations. (PLF 13 & 26) For side wall mounting only.

**Construction**

**Housing and Lens:**

Corrosionproof and vandal resistant polycarbonate.

**Lens Gasket:**

High temperature tubular silicone.

**Reflector:**

Anodized aluminum.

**Minimum Temperature:**

0°F.

**Electrical**

**Sockets:**

GX23 base.

**Optical**

**Lamp:**

Two 13 watt compact fluorescent lamps supplied with fixture.

**LED Characteristics**

**Correlated Color Temp. (Nominal CCT):**

2700K.

**Other**

**Country of Origin:**

Designed by RAB in New Jersey and assembled in Taiwan.


**Trade Agreements Act Compliant:**

This product is a product of Taiwan and a "designated country" end product that complies with the Trade Agreements Act.

**GSA Schedule:**

Suitable in accordance with FAR Subpart 25.4.

**Dimensions**

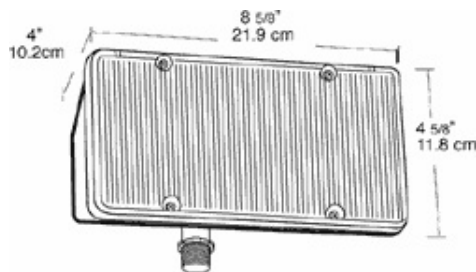

**Features**

Corrosion and vandal resistant polycarbonate housing and lens

Anodized aluminum reflector

0°F minimum operating temperature

High temperature tubular silicone gasket on PLF39 model

Heavy duty cast aluminum mounting arm and swivel with stainless steel screw

1/2" thread fits all standard covers