



Replace existing triple tube PL lamps with a GX24Q base. Simply plug and play on the existing ballast.

Color: White

Weight: 0.5 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Watts 16.00W
 Color Temp 3000K (Warm White)
 Lumens 1,750
 Efficacy 109.4 LPW
 Color Accuracy 82 CRI
 L70 Accuracy 50,000

LED Info

Input Voltage ballast dependent
 Power Factor Ballast Dependent
 Flicker N/A
 THDi N/A
 R9

Technical Specifications

Technical Specifications

Product Type:

Compact

Bulb Shape:

PLT-H

Finish:

Frosted

Wattage:

16WW

Wattage Equivalency:

42WW Fluorescent

Typical Lumen Output:

1750

Efficacy:

110 lm/W

Color Temperature:

3000K Warm White

CRI:

82

Base Type:

GX24q

L70 Lifespan:

50,000 hours

Operating Temperature:

-20°C - 45°C

Dimmable:

No

Beam Angle:

111°

Warranty:

5-Year, No-Compromise Warranty

Installation Type:

Type A, Plug and Play

Installation Orientation:

Horizontal

For Use in Emergency Fixtures:

No

For Use Outdoors in Open Fixtures:

No

Technical Specifications (continued)

Electrical Characteristics

Input Voltage:

Ballast Dependent

Power Factor:

Ballast Dependent

Operating Frequency:

Ballast Dependent

Input Current @ 120V:

Ballast Dependent

Input Current @ 277V:

Ballast Dependent

Listings


UL Listed:

Yes

CEC Status:



Lawful for sale in California

Dimensions



1 5/8" ~ 1 11/16"
40.9mm ~ 42.9mm

1 9/16" ~ 1 5/8"
39.1mm ~ 40.9mm

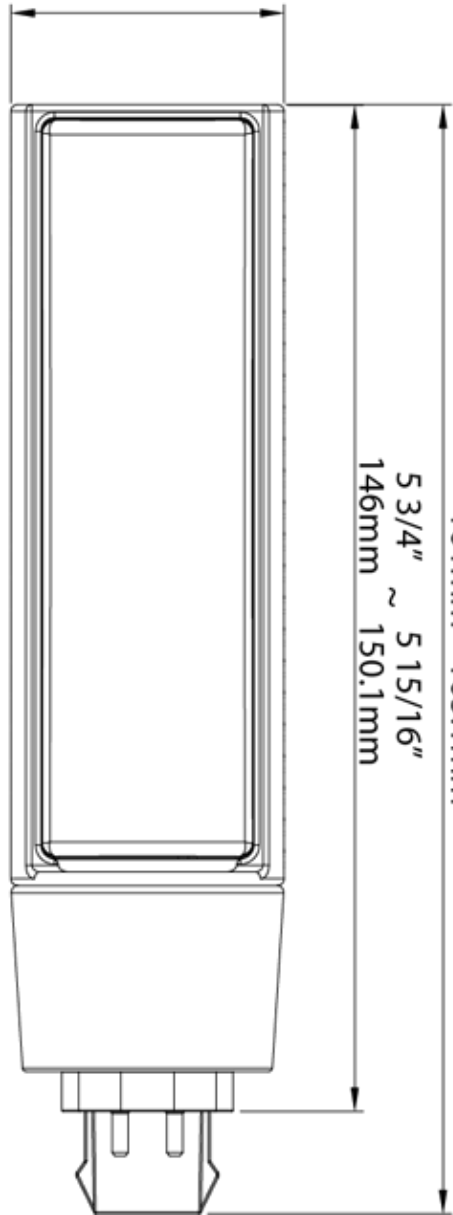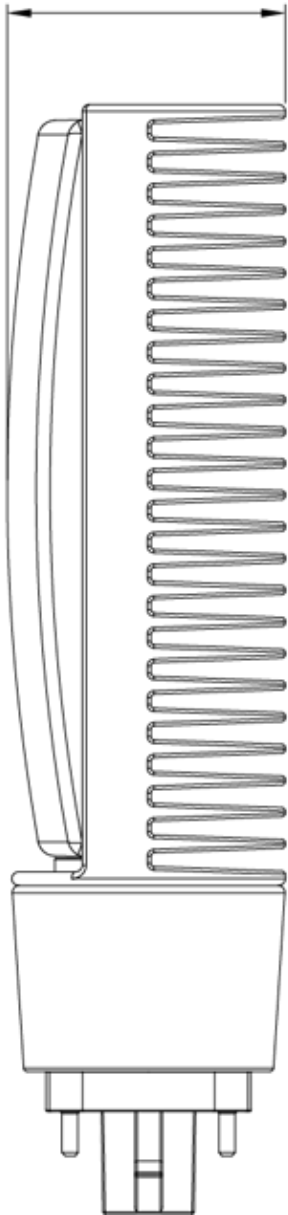

6 5/16" ~ 6 1/2"
161mm ~ 165.1mm
5 3/4" ~ 5 15/16"
146mm ~ 150.1mm