



Replace existing triple tube PL lamps with a GX24Q base. Simply plug and play on the existing ballast.

Color: White

Weight: 0.5 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

LED Info

Watts	16.00W	Input Voltage	ballast dependent
Color Temp	3500K (Neutral White)	Power Factor	Ballast Dependent
Lumens	1,750	Flicker	N/A
Efficacy	109.4 LPW	THDi	N/A
Color Accuracy	82 CRI	R9	
L70 Accuracy	50,000		

Technical Specifications

Technical Specifications

Product Type:

Compact

Bulb Shape:

PLT-H

Finish:

Frosted

Wattage:

16WW

Wattage Equivalency:

42WW Fluorescent

Typical Lumen Output:

1750

Efficacy:

110 lm/W

Color Temperature:

3500K Neutral White

CRI:

82

Base Type:

GX24q

L70 Lifespan:

50,000 hours

Operating Temperature:

-20°C - 45°C

Dimmable:

No

Beam Angle:

111°

Warranty:

5-Year, No-Compromise Warranty

Installation Type:

Type A, Plug and Play

Installation Orientation:

Horizontal

For Use in Emergency Fixtures:

No

For Use Outdoors in Open Fixtures:

No

Technical Specifications (continued)

Electrical Characteristics

Input Voltage:

Ballast Dependent

Power Factor:

Ballast Dependent

Operating Frequency:

Ballast Dependent

Input Current @ 120V:

Ballast Dependent

Input Current @ 277V:

Ballast Dependent

Listings


UL Listed:

Yes

CEC Status:



Lawful for sale in California

Dimensions



1 5/8" ~ 1 11/16"
40.9mm ~ 42.9mm

1 9/16" ~ 1 5/8"
39.1mm ~ 40.9mm

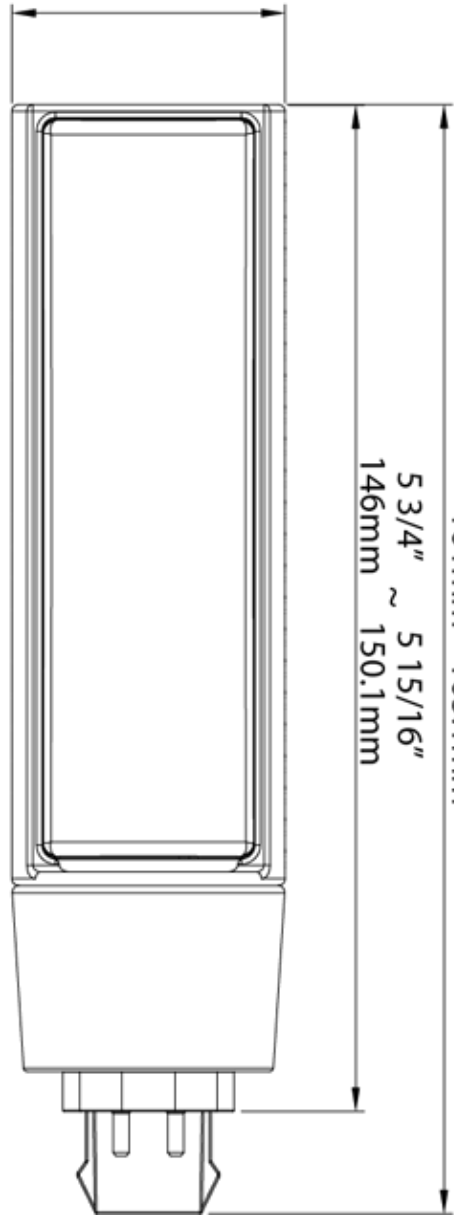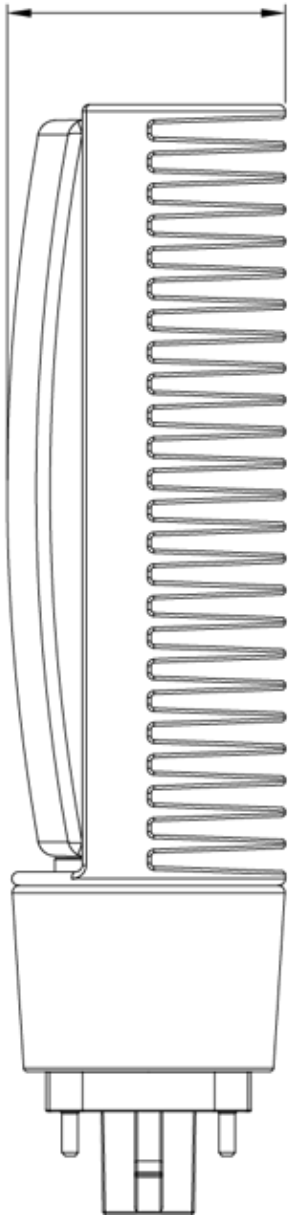

6 5/16" ~ 6 1/2"
161mm ~ 165.1mm
5 3/4" ~ 5 15/16"
146mm ~ 150.1mm