



This ultra high efficiency LED large garage light delivers up to 111 lumens per Watt. An integrated motion/photo sensor option provides multi-level lighting control. Available in 70, 80 and 105W versions. Fixture measures 18" L x 18" W.

Color: White

Weight: 0.0 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	105W
120V	0.87A	Color Temp	N/A
208V	0.52A	Color Accuracy	N/A
240V	0.45A	L70 Lifespan	N/A
277V	0.39A	Lumens	11,821
Input Watts	103.5W	Efficacy	114.2 lm/W

## Technical Specifications

### Listings

#### UL Listed:

Suitable for wet locations

#### California Title 24:

Can be used to conform with the requirements of California Title 24 Part 6.

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. DLC Product Code: P24QVHQZ

### Construction

#### IP Rating:

Ingress Protection rating of IP66 for dust and water

#### Lens:

Frosted polycarbonate

#### Gaskets:

High-temperature silicone

#### Ambient Temperature:

Suitable For use in 40°C (104°F)

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

### Other

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

### Electrical

#### Driver:

Constant current, Class 2, 100 - 277V and 480V, 50/60 Hz, 120V: 0.87A, 208V: 0.52A, 240V: 0.45A, 277V: 0.38A, 480V: 0.23A, surge protection 4kV, THD &#8804 20%, pF 90%


#### THD:

3.1% at 120V, 7.1% at 277V

#### Power Factor:

99.9% at 120V, 95.6% at 277V

## Dimensions

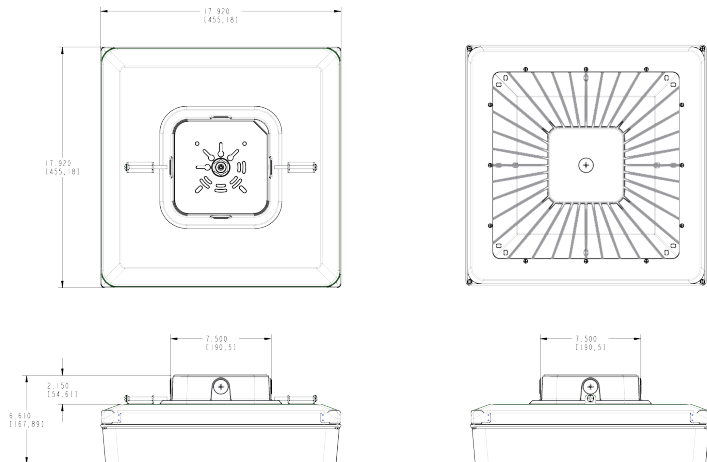

## Features

- Ultra-high efficiency
- Pendant or surface mount
- Low glare, vandal-resistant polycarbonate lens
- 20% uplight eliminates "cave effect"
- 100,000-Hour LED lifespan
- 5-Year, No-Compromise Warranty

## Ordering Matrix

Family	Wattage	Color Temp	Finish	Driver Options	Sensor Options	Other Options
PRT	105	Y	W	/D10	/WS	
	<b>30</b> = 30W (14" x 14") <b>42</b> = 42W (14" x 14") <b>55</b> = 55W (14" x 14") <b>70</b> = 70W (18" x 18") <b>80</b> = 80W (18" x 18") <b>105</b> = 105W (18" x 18")	<b>Blank</b> = 5000K (Cool) <b>N</b> = 4000K (Neutral) <b>Y</b> = 3000K (Warm)	<b>Blank</b> = Bronze <b>W</b> = White	<b>Blank</b> = 120-277V On/Off <b>/480</b> = 480V On/Off <b>/D10</b> = 120-277V w/ 0-10V Dimming <b>/480/D10</b> = 480V w/ 0-10V Dimming <b>/E2</b> = Battery Backup <b>/D10/E2</b> = 0-10V Dimming w/ Battery Backup	<b>Blank</b> = No Option <b>/WS</b> = Multi-Level Motion Sensor for 14" <sup>1</sup> <b>/WS2</b> = Multi-Level Motion Sensor for 18" <sup>1</sup> <b>/PCS</b> = 120V Swivel Photocell <b>/PCS2</b> = 277V Swivel Photocell <b>/PCS4</b> = 480V Swivel Photocell <b>/LC</b> = Lightcloud® Controller	<b>USA</b> = BAA Compliant <b>Blank</b> = Standard

<sup>1</sup> Only available for 120-277V with 0-10V dimming driver.