



<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

<b>Lamp Info</b>		<b>Ballast Info</b>	
Type:	T5HO	Type:	Prog. Start
Watts:	324W	120V:	3.00A
Shape/Size:	N/A	208V:	1.77A
Base:	N/A	240V:	1.54A
ANSI:	N/A	277V:	1.33A
Hours:	20,000	Input Watts:	362W
Lamp Lumens:	24,008	Efficiency:	90%
Efficacy:	66 LPW		

## Technical Specifications

### Listings

#### UL Listing:

Dry Locations Only. Ceiling Mount Only.

### Construction

#### Housing:

Heavy duty 22 gauge steel housing and wiring box with 1/2" NPS knockouts. Painted white. Easy wiring and maintenance access panel. Includes "Y" hooks.

#### Reflector:

Aluminum High Performance brilliant bevel segmented reflectors.

#### Base:

Medium Bi Pin.

### Reflector:

Alanod 320G-E with reflectivity of ≥86%.

### Optical

#### Lamp:

T5HO (not supplied).

### Other

#### CRI:

85

#### Mounts:

Surface or Chain (Y Hooks included).

### Electrical

#### Total Watts:

6x54W.

#### Input Volts:

120-277V.


#### Input Amps:

3.0/1.28.

#### Ballast Factor:

1.00.

## Dimensions

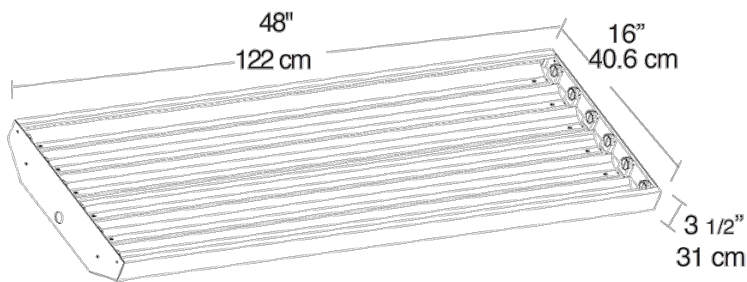

## Features

- Qualifies for EPA Act 2005 incentives
- Post-painted, high reflective gloss white powder coat finish
- High Performance, brilliant bevel segmented reflectors
- Easy wiring and maintenance access panel
- Rotary locking lamp holders for vibration security and easy relamping
- Heavy duty 22 gauge steel Rigid strong housing with no sharp edges