




**Dimensions**

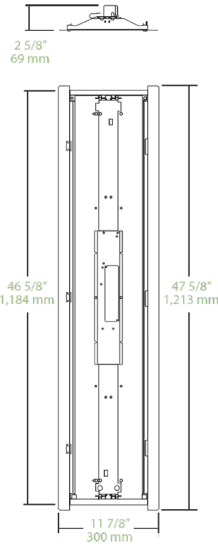

**Features**

- Troffer Retrofit can be installed in under 3 minutes by 1 person
- Frosted polycarbonate lens provides a uniform distribution and reduces glare
- 0-10V dimming standard
- 5-Year No Compromise Warranty

**Ordering Matrix**

Family	Size	Wattage	Color Temp	Finish	CRI	Dimming Driver	Options	Bulk Qty
RTLED	1X4	29	YN	W		/D10	/E2	
	<b>1X4</b> = 1'x4' <b>2X2</b> = 2'x2' <b>2X4</b> = 2'x4'	<b>19</b> = 19W (2x2, 1x4) <b>29</b> = 29W (2x2, 1x4) <b>39</b> = 39W (2x4) <b>49</b> = 49W (2x4)	<b>Blank</b> = 5000K (Cool) <b>N</b> = 4000K (Neutral) <b>YN</b> = 3500K (Warm Neutral) <b>Y</b> = 3000K (Warm)	<b>W</b> = White	<b>Blank</b> = 80 CRI <b>/HC</b> = 90 CRI (4000K only)	<b>/D10</b> = 0-10V Dimming	<b>Blank</b> = No Options <b>/LC</b> = Lightcloud® Controller <b>/E2</b> = Battery Backup <b>/MVS</b> = Microwave Sensor <b>/MVS/E2</b> = Microwave Sensor and Battery Backup	<b>Blank</b> = Individual <b>BULK</b> = Comes in qty 6 (not available with options)