

Technical Specifications (continued)

Sensor Specifications

Time Delay:

5s, 30s, 1min, 5min, 10min, 20min, 30min

Cut Off Period:

0s, 10s, 1min, 5min, 10min, 30min, 1hr, Bi-Level

Cut-Off Dimming level:

10, 20, 30, 50%

Cut-Off Power:

Less than 1W

Daylight Threshold:

About .2-5 fc for disabled

Sensor Principle:

High Frequency

Microwave Frequency:

5.8GHz +/- 75MHz

Microwave Power:

<0.2mW

Detection Range Max:

52.5 feet across, 32.8 feet high

Detection Angle:

About 30 to 150 degrees

Remote Control:

Adjust settings using remote control (catalog# MVSREM). Only available with 0-10V dimming driver options.

Other


Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

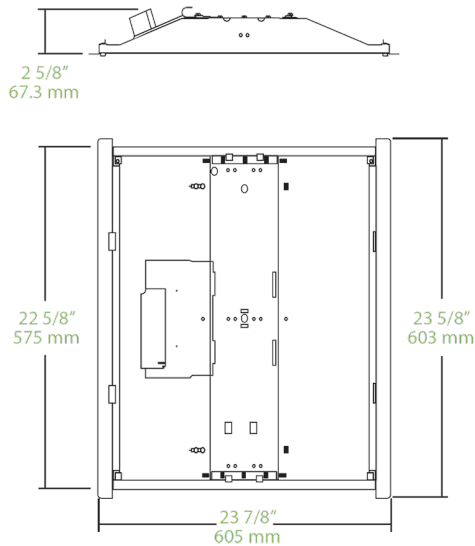

Features

Troffer Retrofit can be installed in under 3 minutes by 1 person

Frosted polycarbonate lens provides a uniform distribution and reduces glare

0-10V dimming standard

5-Year No Compromise Warranty

Ordering Matrix

Family	Size	Wattage	Color Temp	Finish	CRI	Dimming Driver	Options	Bulk Qty
RTLED	2X2	29	Y	W		/D10	/MVS/E2	
	1X4 = 1'x4'	19 = 19W (2x2, 1x4)	Blank = 5000K (Cool)	W = White	Blank = 80 CRI /HC = 90 CRI (4000K only)	/D10 = 0-10V Dimming	Blank = No Options /LC = Lightcloud® Controller /E2 = Battery Backup /MVS = Microwave Sensor /MVS/E2 = Microwave Sensor and Battery Backup	Blank = Individual BULK = Comes in qty 6 (not available with options)
	2X2 = 2'x2'	29 = 29W (2x2, 1x4)	N = 4000K (Neutral)					
	2X4 = 2'x4'	39 = 39W (2x4)	YN = 3500K (Warm Neutral)					
		49 = 49W (2x4)	Y = 3000K (Warm)					