



LED roadway lighting that's easy to buy. Free trial program and leasing options make it easy to get started with LED. Specification-grade optics deliver efficient, clean, uniform light distributions at a reasonable cost. Optics are factory installed and meet IES Lateral Distribution Type II. LROAD™ 50W replaces 200W metal halide roadway fixtures.

Color: Gray

Weight: 33.5 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type: Constant Current
 120V: 0.46A
 208V: 0.27A
 240V: 0.23A
 277V: 0.20A
 Input Watts: 56W
 Efficiency: 89%

LED Info

Watts: 50W
 Color Temp: 5000K
 Color Accuracy: 71 CRI
 L70 Lifespan: 100000
 Lumens: 7070
 Efficacy: 126 LPW

Technical Specifications

Listings

UL Listing:

Suitable for wet locations as a downlight.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC Product Code: P00001789

IESNA LM-79 & IESNA LM-80 Testing:

RAB LED fixtures have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

Dark Sky Approved:

The International Dark Sky Association has approved this product as a full cutoff, fully shielded luminaire.

LED Characteristics

Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

LEDs:

Multi-chip, high-output, long-life LEDs

Color Consistency:

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color.

Color Stability:

LED color temperature is warrantied to shift no more than 200K in CCT over a 5 year period.

Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Construction

IES Classification:

The Type II distribution is ideal for entrance roadways, collector roads and other long, single-sided and narrow lighting applications. This type of lighting is commonly found on smaller local streets.

Effective Projected Area:

EPA = 0.75

IP Rating:

Ingress Protection rating of IP66 for dust and water

Vibration Rating:

Industry-leading 5G vibration rating per ANSI C136.31.

Ambient Temperature:

Suitable for use in 40°C (104°F) ambient temperatures.

Cold Weather Starting:

Minimum starting temperature is -40°C (-40°F)

Thermal Management:

Superior thermal management design with external Air-Flow fins provides maximum operational life, even in high ambient temperature environments.

Lens:

Tempered glass lens.

Housing:

Die cast aluminum housing, lens frame and mounting arm.

Mounting:

Fits most standard roadway upsweep arms. Adaptor brackets supplied fit 1", 1 1/4", 1 1/2" and 2" OD arms.

Wedge Mounting Option:

Allows field adjustment of +/- 5 degree tilt to achieve a level installation of LROAD50 universal adaptor roadway fixtures.

Recommended Mounting Height:

Up to 15 ft.

Reflector:

Specular vacuum-metallized polycarbonate

Gaskets:

High temperature silicone gaskets

Finish:

Formulated for high-durability and long lasting color.

Electrical

Driver:

Constant Current, Class 2, 1400mA, 100-277V, 50-60Hz, 0.8A, Power Factor 99%

Surge Protection:

6kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2.

Technical Specifications (continued)

Electrical

THD:

6.1% at 120V, 9.4% at 277V

Power Factor:

99.6% at 120V, 96% at 277V

Other

California Title 24:

See RWLED2T50/PCT for a 2013 California Title 24 compliant model.

Patents:

The LROAD™ design is protected by patents pending in the U.S., Canada, China, Taiwan and Mexico.

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of ten (10) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

FTC Country of Origin:

This product was assembled in the USA by RAB using imported components.

Buy American Act Compliance:


This product complies with the Buy American Act.

Optical

BUG Rating:

B1 U0 G1

Dimensions

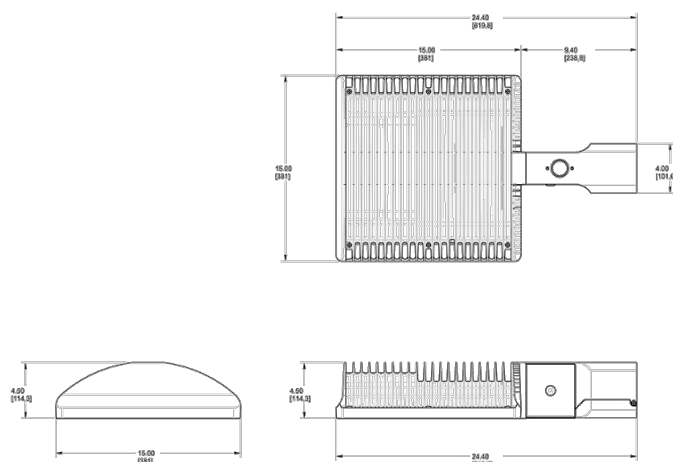

Features

Ideal for entrance roadways, collector roads, and single-sided roads

27 year lifespan dramatically reduces maintenance and re-lamping costs

Precision optics deliver maximum downward street side lumens with uniformity and minimal glare

Compatible with standard roadway arms

Universal adaptors for 1", 1 1/4", 1 1/2" and 2" OD pipe included

Industry-leading 5G vibration rating per ANSI C136.31

Easy-access electrical compartment makes wiring fast and secure

10-Year no compromise warranty

Ordering Matrix

| Family | Distribution | Wattage | Mounting | Color Temp | Finish | Options |
|--------|---------------|------------|---------------------|----------------------|----------------|----------------------------------------------|
| RWLED | 2T | 50 | | | RG | |
| | 4T = Type IV | 150 = 150W | Blank = Roadway Arm | Blank = 5000K (Cool) | Blank = Bronze | Blank = No Option |
| | 3T = Type III | 125 = 125W | SF = Slipfitter | N = 4000K (Neutral) | RG = Gray | /PCT = 120-277V Twistlock Photocell |
| | 2T = Type II | 105 = 105W | | Y = 3000K (Warm) | W = White | /PCS = 120V Swivel Photocell |
| | | 78 = 78W | | | | /PC2 = 277V Swivel Photocell |
| | | 50 = 50W | | | | /BL = Bi-Level Control |
| | | | | | | /D10 = 0-10V Dimming |
| | | | | | | /480 = 480V Driver |
| | | | | | | /480/PCS4 = 480V w/ 480V Swivel Photocell |
| | | | | | | /480/PCT4 = 480V w/ 480V Twistlock Photocell |