# **SHARK4M-50YW/480**





The four-foot SHARK is available in 36W and 50W versions. This impact-resistant linear LED washdown fixture is ideal for car washes, tunnels, stainwells and other hard-to-reach areas where relamping is difficult and costly. 0-10V dimming models available.

Color: White Weight: 13.3 lbs

Project:	Туре:
Prepared By:	Date:

Driver Info		LED Info	
Type:	Constant Current	Watts:	50W
120V:	N/A	Color Temp:	3000K
208V:	N/A	Color Accuracy:	72 CRI
240V:	N/A	L70 Lifespan:	100000
277V:	N/A	Lumens:	5,401
Input Watts:	53W	Efficacy:	103 LPW
Efficiency:	95%		

## **Technical Specifications**

## Listings

#### **UL Listing:**

Marine Listed Outside Type (Saltwater). Listed according to UL1598A.

#### **NEMA Rating:**

4X, protected against corrosion

## IESNA LM-79 & LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

#### **Electrical**

## Driver:

Class 2 Constant Current, 4kV, 347-480VAC, 50-60Hz

#### THD:

7.8% at 347V, 16.6% at 480V

#### **Power Factor:**

97.5% at 347V, 89.1% at 480V

## Construction

#### IP Rating:

Ingress Protection rating of IP66 for dust and water

#### Reflector/Tray:

Aluminum

## Housing:

5VA impact-resistant polycarbonate with stainless steel door clips. 1/2" openings for conduit and bushing/cord entry.

#### Mounting:

Quick-mount, surface, stainless steel spring clips supplied. 4 additional mounting accessory kits available.

#### Lens:

Textured, diffuse polycarbonate lens for low glare and maximum protection

## Gaskets:

EVA silicone foam

#### **Maximum Ambient Temperature:**

Suitable for use in 104°F (40°C) ambient temperatures

## **Cold Weather Starting:**

The minimum starting temperature is -40°C/-40°F

## Green Technology:

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

## Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

#### **LED Characteristics**

## LEDs:

Long-life, high-efficiency surface mount LEDs

## Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

#### **Color Stability:**

LED color temperature is warrantied to shift no more than 200K in CCT over a 5 year period

## **Color Uniformity:**

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2015

#### Other

## Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

## Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

## **Buy American Act Compliant:**

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

#### Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

#### **GSA Schedule:**


Suitable in accordance with FAR Subpart 25.4.

#### American Bureau of Shipping (ABS):

For use on Mobile Offshore Drilling Units (MODU) and shipping vessels.

# **SHARK4M-50YW/480**



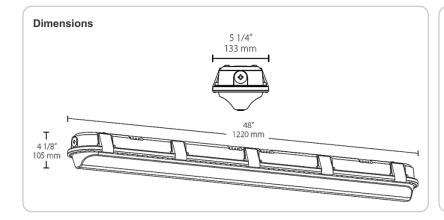

## **Features**

UL Marine Listed

Impact-resistant linear washdown

Ideal for car washes, tunnels and stairwells

Mounting options: Chain, junction box, angled surface mount or vandal-resistant surface mount

IP66 Rating protects against dust & water ingress

5-Year, no compromise warranty

100,000-Hour LED lifespan