


SHARK8-70YW/480/D10



Dimensions

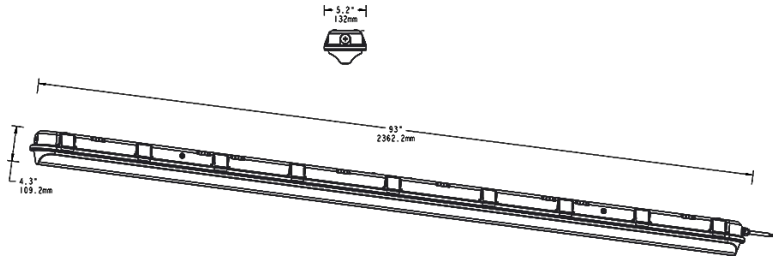

Features

NSF certified for use in food-preparation facilities

American Bureau of Shipping (ABS) approved

Ideal for car washes, tunnels and stairwells

Mounting options:

Chain, junction box, angled surface mount, ceiling mount or vandal-resistant surface mount

IP66 AND NEMA 4X ratings protect against dust, water ingress & corrosion

5-Year, no compromise warranty

100,000-Hour LED lifespan

Ordering Matrix

Family	Length	Watts	Color Temp	Finish	Voltage	Dimming	Battery Backup	Sensor	Bi-Level
SHARK	8	70	Y	W	/480	/D10			
	8 = 8 ft	100 = 100W 70 = 70W	Blank = 5000K (Cool) Y = 3000K (Warm) YN = 3500K (Warm Neutral) N = 4000K (Neutral)	W = White	Blank = 120-277V /480 = 480V	D10 = Dimmable	Blank = No Battery Backup /E2 = 120-277V Battery Backup	Blank = No Occupancy Sensor /MVS = Occupancy Sensor	Blank = No Bi-Level /BL = Bi-Level