



**Technical Specifications (continued)**

**Construction**

**Trim Style:**

Smooth Trim

**Mounting:**

Surface mount

**Operating Temperature Range:**

-20°C - 40°C (-4°F - 104°F)

**Other**


**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Dimensions**

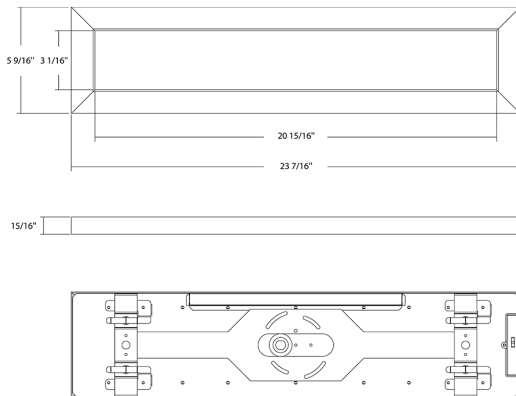

**Features**

- Select from 5 field-adjustable color temperatures 2700K, 3000K, 3500K, 4000K, or 5000K
- Suitable for indoor applications in dry and damp environments
- Dimmable, see Dimmer Compatibility List
- Meets California Title 24 requirements
- 50,000 life hours
- 5-year, no compromise warranty

**Ordering Matrix**

Family	Size	CRI/Color Temp	Finish	Voltage/Dimming
SML	2			
	2 = 2 ft, 25W	Blank = 90 CRI, Field Adjustable	Blank = White	Blank = 120-277V, TRIAC
	3 = 3 ft, 35W			
	4 = 4 ft, 45W			