



LED efficiency and performance in an ultra-economical center basket troffer.
 Color: White Weight: 8.4 lbs

| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|-------------|------------------|----------------|----------------------|
| Type | Constant Current | Watts | 19W |
| 120V | 0.16A | Color Temp | 3500K (Warm Neutral) |
| 208V | 0.10A | Color Accuracy | 84 CRI |
| 240V | 0.08A | L70 Lifespan | 60,000 |
| 277V | 0.07A | Lumens | 2,153 |
| Input Watts | 18.5W | Efficacy | 116.4 lm/W |

Technical Specifications

Listings

UL Listed:

Suitable for damp locations

CCEA Compliant:

Luminaire Requirements used in Environmental Air Space per the electrical code specification of the City of Chicago

IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

Electrical

Driver:

Class 2, Constant Current, 120-277V, 50/60Hz, 120V: 0.16A, 208V: 0.10A, 240V: 0.08A, 277V: 0.07A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

7.08% at 120V, 11.35% at 277V

Power Factor:

99% at 120V, 90.4% at 277V

Surge Protection:

2.5kV

Battery Backup:

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

Battery Backup Light Loss Factor:

0.05

Construction

Cold Weather Starting:

The minimum starting temperature is -20°C (-4°F)

Ambient Temperature:

Suitable for use in up to 40°C (104°F)

IC Rated:

Suitable for direct contact with insulation

Housing:

Die-formed, 24-gauge, cold-rolled steel

Technical Specifications (continued)

Construction

Mounting:

Integral T-grid clips make installation easy and secure

Reflector:

Integral reflector (on the sides) with high reflectance finish, optimized for uniform distribution.

Lens:

Frosted polycarbonate

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Performance

Lifespan:

60,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Sensor Specifications

Maximum Mounting Height:

13 ft.

Voltage:

12V DC (+3V-0V)

Dimming:

0-10V dimming output, max 20mA sinking current

Operating Temperature:

-20°C - 50°C (-4°F - 122°F)

Storage Temperature:

-25°C - 70°C (-13°F - 158°F)

Operating Humidity:

5% - 93% without condensation

IP Rating:

IP20

Warm Up Time:

45s +/-5s

Standby (w):

<0.3W

Module Interaction:

Wire AWG 22 (Grey Dim -, Purple Dim +, Yellow 12V DC)

On-Time Adjustment:

10s, 5min, 10min, 30min with +/-5% tolerance (Factory Setting: 30min +/-5%)

Bi-Level:

0, 10%, 30%, 50% with +/-5% tolerance (Factory Setting: 10%)

Debounce Time:

Day to Night: 5s
Night to Day: 30s

Open Circuit Protection:

No

Short Circuit Protection :

Yes

Other

Equivalency :

Equivalent to (2) F17T8


5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

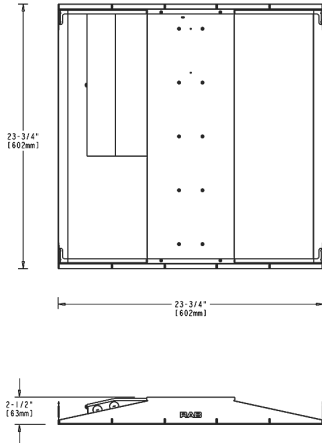

Features

- Optional surface and recessed mount kits available
- Optional programmable occupancy sensor for multi-level lighting control
- 0-10V dimming standard on all models
- 60,000-hour LED lifespan
- 5-Year, Limited Warranty

Ordering Matrix

| Family | Size | Wattage | Color Temp | Options |
|---------|--------------------------------|---|--|--|
| SWISH34 | 2X2 | 19 | YN | /PIR/E2 |
| | 2X2 = 2' x 2' 2X4 = 2' x 4' | 19 = 19W (2' x 2') 29 = 29W (2' x 2', 2' x 4') 39 = 39W (2' x 4') | N = 4000K (Neutral) YN = 3500K (Warm Neutral) | Blank = No Option /E2 = Battery Backup /LC = Lightcloud® Controller /LCS = Lightcloud® Sensor /PIR = Passive Infrared Occupancy Sensor /LC/E2 = Lightcloud® Controller w/ Battery Backup /LCS/E2 = Lightcloud® Sensor w/ Battery Backup /PIR/E2 = Passive Infrared Occupancy Sensor w/ Battery Backup |