



Replace conventional T5/T8/T12 fluorescent tubes. Double-ended line voltage wiring. Works with shunted and non-shunted sockets - no need to change sockets.

Color: White

Weight: 0.5 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Watts:	25W	Input Voltage:	N/A
Color Temp:	3000K (Warm White)	Power Factor:	0.9
Lumens:	3,300	Flicker:	N/A
Efficacy:	132 LPW	THDi:	<20%
Color Accuracy:	82 CRI		
L70 Accuracy:	50,000		

Technical Specifications

Description

Lamp Type:

Linear T5

Bulb Type:

T5

Base Type:

G5, Miniature Bipin

Dimmable:

No

Length:

4ft

Material:

Glass

LED Characteristics

Installation Type:

Type B, Ballast Bypass, Double Ended Wire

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

MOL (inches):

45.8"

MOD (inches):

0.65"

Other

Equivalent:

54W Fluorescent T5

Warranty:

5 years

Optical

Beam Angle:

240°

Listings

CEC Status:

Lawful for sale in California

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC Product Code: POWGAPJJ

Shipping Information

Case Qty:

25

Case Dimensions:

47.83 x 7.09 x 7.48


Pallet Quantity of Pieces:

900

Pallet Dimensions:

49.21 x 39.37 x 49.61

Dimensions

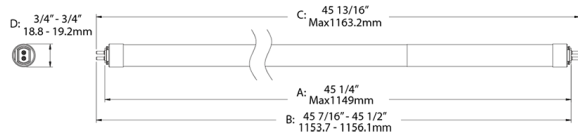

Features

Internal Driver eliminates the need for external ballasts or drivers

Can be wired either using Single Ended or Double Ended wiring method for maximum flexibility in the field and simplifies stocking multiple skus

Suitable for use in enclosed and open fixtures

Approximately 40% More Energy Efficient than Standard T8 Lamps

Start up instantly, no flicker or hum like conventional fluorescent tubes

Environmentally friendly, no mercury used and are easy to recycle