



Replace conventional T5/T8/T12 fluorescent tubes. Double-ended line voltage wiring. Works with shunted and non-shunted sockets - no need to change sockets.

Color: White

Weight: 0.5 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Watts:	25W	Input Voltage:	N/A
Color Temp:	4000K (Cool White)	Power Factor:	0.9
Lumens:	3,500	Flicker:	N/A
Efficacy:	140 LPW	THDi:	<20%
Color Accuracy:	82 CRI		
L70 Accuracy:	50,000		

Technical Specifications

Description

Lamp Type:

Linear T5

Bulb Type:

T5

Base Type:

G5, Miniature Bipin

Dimmable:

No

Length:

4ft

Material:

Glass

LED Characteristics

Installation Type:

Type B, Ballast Bypass, Double Ended Wire

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

MOL (inches):

45.8"

MOD (inches):

0.65"

Other

Equivalent:

54W Fluorescent T5

Warranty:

5 years

Optical

Beam Angle:

240°

Listings

CEC Status:

Lawful for sale in California

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC Product Code: P4ZNIOTD

Shipping Information

Case Qty:

25

Case Dimensions:

47.83 x 7.09 x 7.48


Pallet Quantity of Pieces:

900

Pallet Dimensions:

49.21 x 39.37 x 49.61

Dimensions

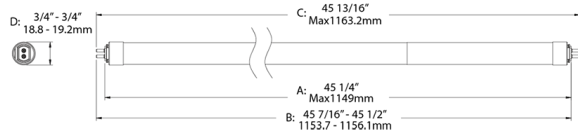

Features

- Internal Driver eliminates the need for external ballasts or drivers
- Can be wired either using Single Ended or Double Ended wiring method for maximum flexibility in the field and simplifies stocking multiple skus
- Suitable for use in enclosed and open fixtures
- Approximately 40% More Energy Efficient than Standard T8 Lamps
- Start up instantly, no flicker or hum like conventional fluorescent tubes
- Environmentally friendly, no mercury used and are easy to recycle