

**Project:**

**Type:**

**Prepared By:**

**Date:**



**UPC: 19813510200**



### Features and Benefits

**UL LISTED** - For damp locations in enclosed fixtures

**LIFESPAN** - 50,000-hours LED lifespan based on IES LM-80 results and TM-21 calculations

**LEDs** - On both sides of the tube provides 360-degree light output

**OPTICS** - Provide smooth even light without hot spots

**MULTIPLE LENGTHS** - Available for any application need

**120V-277V** - Universal voltage

**AMBIENT TEMPERATURE** - -20°C/-4°F to 55°C/131°F

**ROTATABLE ENDCAPS** - Direct light where you need it

**CONSTRUCTION** - Robust plastic and aluminum to minimize breakage

**GREEN TECHNOLOGY** - Mercury and UV free. RoHS-compliant components

**INSTALLATION** - Double-ended bypass installation for simple install and reduced maintenance costs

### Technical Specifications

Product Type	Linear
Bulb Shape	T8
Base Type	R17d
Nominal Length	4FT
Finish	Clear
Wattage	19.5W
Typical Lumen Output	2600
Efficacy	133 lm/W
Color Temperature	6500K Daylight Deluxe
CRI	80
L70 Lifespan	50,000 hours
Dimmable	No
Warranty	5-Year, No-Compromise Warranty
Installation Type	Type B, Ballast Bypass
For Use in Emergency Fixtures	No
Accessories	Cable Kit 4FT: <a href="#">ST-4L-CABLE-KIT</a> Cable Kit 6FT: <a href="#">ST-6L-CABLE-KIT</a> Surge Protector Compatibility: <a href="#">SP10KV</a>

### Electrical Characteristics

Operating Frequency	50 / 60 Hz
Input Voltage	120-277V
Power Factor	>0.9
THDi	<20%

### Listings



UL Listed Suitable for damp locations. Suitable for use in enclosed fixtures. Listed in SAM Manual.

CEC Status Lawful for sale in California

## Case and Pallet Dimensions

	QTY	LENGTH	WIDTH	HEIGHT
CASE	10	7.7	3	51.2
PALLET	550	39.4	43.3	51.2

## Wiring Diagram

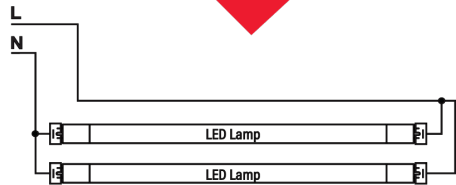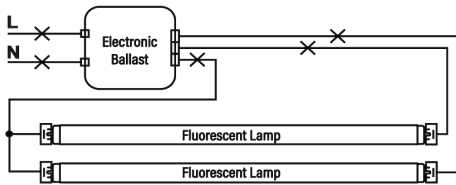

## Dimension

