

Project:	Type:	Prepared By:	Date:
-----------------	--------------	---------------------	--------------



Features and Benefits

UL LISTED - For damp locations in enclosed fixtures

LIFESPAN - 50,000-hours LED lifespan based on IES LM-80 results and TM-21 calculations

LEDs - On both sides of the tube provides 360-degree light output

OPTICS - Provide smooth even light without hot spots

MULTIPLE LENGTHS - Available for any application need

120V-277V - Universal voltage

AMBIENT TEMPERATURE - -20°C/-4°F to 55°C/131°F

ROTATABLE ENDCAPS - Direct light where you need it

CONSTRUCTION - Robust plastic and aluminum to minimize breakage

GREEN TECHNOLOGY - Mercury and UV free. RoHS-compliant components



INSTALLATION - Double-ended bypass installation for simple install and reduced maintenance costs

Technical Specifications		Electrical Characteristics	
Product Type	Linear	Operating Frequency	50 / 60 Hz
Bulb Shape	T8	Input Voltage	120-277V
Base Type	R17d	Power Factor	>0.9
Nominal Length	5FT	THDi	<20%
Finish	Clear	Listings	
Wattage	24W	UL Listed	Suitable for damp locations. Suitable for use in enclosed fixtures. Listed in SAM Manual.
Typical Lumen Output	3250	CEC Status	Lawful for sale in California
Efficacy	135 lm/W		
Color Temperature	6500K Daylight Deluxe		
CRI	80		
L70 Lifespan	50,000 hours		
Dimmable	No		
Warranty	5-Year, No-Compromise Warranty		
Installation Type	Type B, Ballast Bypass		
For Use in Emergency Fixtures	No		
Accessories	Cable Kit 4FT: ST-4L-CABLE-KIT Cable Kit 6FT: ST-6L-CABLE-KIT Surge Protector Compatibility: SP10KV		

Case and Pallet Dimensions

	QTY	LENGTH	WIDTH	HEIGHT
CASE	10	7.7	3	63.1
PALLET	550	43.7	43.3	65.7

Wiring Diagram

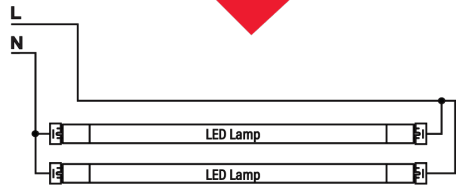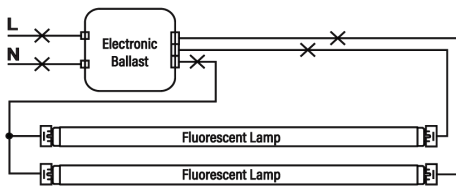

Dimension

