

Project:

Type:

Prepared By:

Date:



UPC: 19813510248



Features and Benefits

UL LISTED - For damp locations in enclosed fixtures

LIFESPAN - 50,000-hours LED lifespan based on IES LM-80 results and TM-21 calculations

LEDs - On both sides of the tube provides 360-degree light output

OPTICS - Provide smooth even light without hot spots

MULTIPLE LENGTHS - Available for any application need

120V-277V - Universal voltage

AMBIENT TEMPERATURE - -20°C/-4°F to 55°C/131°F

ROTATABLE ENDCAPS - Direct light where you need it

CONSTRUCTION - Robust plastic and aluminum to minimize breakage

GREEN TECHNOLOGY - Mercury and UV free. RoHS-compliant components

INSTALLATION - Double-ended bypass installation for simple install and reduced maintenance costs

Technical Specifications

Product Type	Linear
Bulb Shape	T8
Base Type	R17d
Nominal Length	8FT
Finish	Clear
Wattage	39.5W
Typical Lumen Output	5200
Efficacy	131 lm/W
Color Temperature	6500K Daylight Deluxe
CRI	80
L70 Lifespan	50,000 hours
Dimmable	No
Warranty	5-Year, No-Compromise Warranty
Installation Type	Type B, Ballast Bypass
For Use in Emergency Fixtures	No
Accessories	Cable Kit 4FT: ST-4L-CABLE-KIT Cable Kit 6FT: ST-6L-CABLE-KIT Surge Protector Compatibility: SP10KV

Electrical Characteristics

Operating Frequency	50 / 60 Hz
Input Voltage	120-277V
Power Factor	>0.9
THDi	<20%



Listings

UL Listed	Suitable for damp locations. Suitable for use in enclosed fixtures. Listed in SAM Manual.
CEC Status	Lawful for sale in California

Case and Pallet Dimensions

	QTY	LENGTH	WIDTH	HEIGHT
CASE	10	7.7	2.9	97.8
PALLET	550	40.2	42.5	98.4

Wiring Diagram

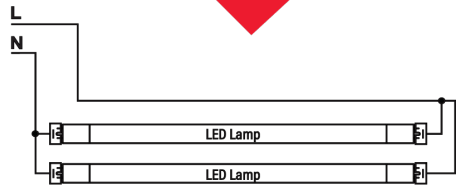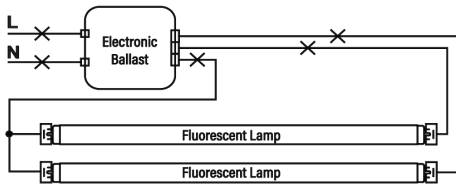

Dimension

