
T8-8-24G-835-SE-BYP

RAB[®] Lamps

	Proj	Project: Prepared By:		Type: Date:	
	Pre				
Replace existing T8/T12 fluorescent tubes. Color: White We	Bight: 0.2 lbs	8W 3500K (Neutral White) s: 960 y: 120 LPW 82 CRI	LED Info Input Voltage: Power Factor: Flicker: THDi:	100-277V 0.9 N/A <20%	
Technical Specifications Listings	Dimmable:	Other			
UL Recognized:	No	Equivalent:			
Yes	Length: 17W Fluorescent T8				
JL Classified:	2ft	Warranty:	Warranty:		
Yes	Material:	5 years	5 years		
Rohs:	Glass	Optical	Optical		
Yes	LED Characteristics	Beam Angle:	Beam Angle:		
CEC Status:	Installation Type:	240°			
Lawful for sale in California	Type B, Ballast Bypass, Single Ended Wire	Shipping Info	Shipping Information		
DLC Qualified:	Lifespan:		Case Qty:		
Yes	50,000-hour LED lifespan based on IES LM-70 re	0.5			
DLC Listed:	Construction		Case Dimensions:		
his product is on the Design Lights Consortium (DLC) Operating Temperature:		25.3 x 7.87 x 7.	25.3 x 7.87 x 7.28		
Qualified Products List and is eligible for rebates from DLC Member Utilities.	-20 - 40°C	Pallet Quant	Pallet Quantity of Pieces:		
DLC Product Code: PCG5SN7J	Bare Lamp Illuminated Length (inches):	1200	1200		
Description	23.22"	Pallet Dimen	Pallet Dimensions:		
Lamp Type:	MOL (inches):		49.21 x 39.37 x 48.82		
Linear T8	23.5"				
Bulb Type:	MOD (inches):				
T8	1.09"				
Base Type:					
G13, Medium Bipin					

T8-8-24G-835-SE-BYP

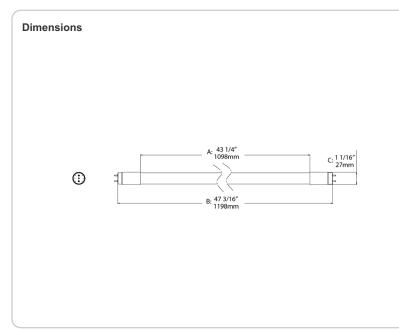

Features

Replacement for conventional Fluorescent T8 or T12 linear tubes

Internal Driver eliminates the need for external ballasts or drivers

Single Ended wiring method works on shunted sockets

Suitable for use in enclosed and open fixtures

Approximately 40% More Energy Efficient that Standard T8 Lamps Start up instantly, no flicker or hum like conventional fluorescent tubes

Environmentally friendly, no mercury used and are easy to recycle