

Project:	Туре:
Prepared By:	Date:

Driver Info LED Info

 Watts:
 8W
 Input Voltage:
 100-277V

 Color Temp:
 4000K (Cool White) Power Factor:
 0.9

 Lumens:
 1,080
 Flicker:
 N/A

 Efficacy:
 135 LPW
 THDi:
 <20%</td>

Color Accuracy: 82 CRI L70 Accuracy: 50,000

## Technical Specifications Listings

UL Recognized:

Yes

**UL Classified:** 

Yes

Rohs: Yes

CEC Status:

Lawful for sale in California

DLC Qualified:

Yes

**DLC Listed:** 

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC Product Code: PC8VKAQC

Description

Lamp Type: Linear T8

Bulb Type:

T8

**Base Type:**G13, Medium Bipin

Dimmable:

No

Length:

2ft

Material:

Glass

**LED Characteristics** 

Installation Type:

Type B, Ballast Bypass, Single Ended Wire

Lifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

**Operating Temperature:** 

-20 - 40°C

Bare Lamp Illuminated Length (inches):

23.22"

MOL (inches):

23.5"

MOD (inches):

1.09"

Other

Equivalent:

17W Fluorescent T8

Warranty: 5 years

Optical

Beam Angle:

240°

**Shipping Information** 

Case Qty:

25


**Case Dimensions:** 

25.3 x 7.87 x 7.28

Pallet Quantity of Pieces:

1200

**Pallet Dimensions:** 49.21 x 39.37 x 48.82

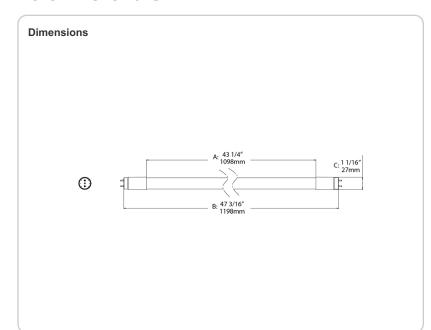

## **Features**

Replacement for conventional Fluorescent T8 or T12 linear tubes
Internal Driver eliminates the need for external ballasts or drivers
Single Ended wiring method works on shunted sockets
Suitable for use in enclosed and open fixtures
Approximately 40% More Energy Efficient that Standard T8 Lamps
Start up instantly, no flicker or hum like conventional fluorescent tubes
Environmentally friendly, no mercury used and are easy to recycle