
T8-8-36G-830-DIR

RAB Lamps

	Project:		Туре:		
	Prepare	Prepared By: Date: Driver Info LED Info		Date:	
RAB	Driver Info				
Replace existing fluorescent tubes. Glass and plastic mo Color: White We	Watts: Color Temp: Lumens: Efficacy: Color Accuracy: L70 Accuracy: L70 Accuracy	1,100 138 LPW 82 CRI		Ballast Dependen Ballast Dependen N/A <20%	
Technical Specifications					
Listings	Base Type:	MOD (inches)	:		
UL Listed:	G13, Medium Bipin	1.09"			
Yes	Dimmable:	Other			
NSF:	No	Equivalent:			
Complies with NSF	Length:	25W Fluorescent	t T8		
FCC:	3ft	Warranty:			
Yes	Material:	5 years			
Rohs:	Glass	Optical			
Yes	LED Characteristics	Beam Angle:			
CEC Status:	Installation Type:	240°			
Lawful for sale in California	Type A, Plug and Play	Shipping Info	Shipping Information		
DLC Qualified:	Lifespan:	Case Qty:	Case Qty:		
Yes	50,000-hour LED lifespan based on IES LM-70 results	25			
DLC Listed:	Construction	Case Dimensions:			
This product is on the Design Lights Consortium (DLC)	Operating Temperature:	37.2 x 7.87 x 7.2	37.2 x 7.87 x 7.28		
Qualified Products List and is eligible for rebates from DLC Member Utilities.	-20 - 40°C	Pallet Quantity of Pieces:			
DLC Product Code: PAGJNJBZ	Bare Lamp Illuminated Length (inches):	900			
Description	35.22"	Pallet Dimensions:			
Lamp Type:	MOL (inches):	49.21 x 39.37 x 4	18.82		
Linear T8	35.5"				
Bulb Type:					
Т8					

T8-8-36G-830-DIR

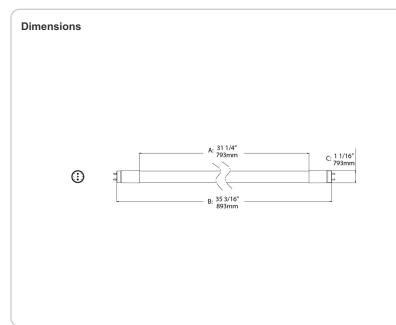

Features

Replacement for conventional Fluorescent T8 linear tubes

Plug and Play, no rewiring, no tools, no instructions

Compatible with most commercial ballasts, refer to our published compatibility guide

Suitable for use in enclosed and open fixtures

Approximately 40% More Energy Efficient that Standard T8 Lamps

Start up instantly, no flicker or hum like conventional fluorescent tubes

Environmentally friendly, no mercury used and are easy to recycle