
T8-8-36G-835-DIR

RAB[®] Lamps

	Project	:	Type: Date:	
	Prepare	ed By:		
RAB	Driver Int	ō	LED Info	
Replace existing fluorescent tubes. Glass and plastic mo Color: White We	Watts: Color Temp Lumens: Efficacy: Color Accuracy:	8W 3500K (Neutral White) 1,200 150 LPW 82 CRI	Input Voltage: Ballast Dependent Power Factor: Ballast Dependent Flicker: N/A THDi: <20%	
Technical Specifications				
Listings	Base Type:	MOD (inches):		
UL Listed:	G13, Medium Bipin	1.09"		
Yes	Dimmable:	Other		
NSF:	No	Equivalent:		
Complies with NSF	Length:	25W Fluorescent	Т8	
FCC:	3ft	Warranty:		
Yes	Material:	5 years		
Rohs:	Glass	Optical	Optical	
Yes	LED Characteristics	Beam Angle:	Beam Angle:	
CEC Status:	Installation Type:	240°	_	
Lawful for sale in California	Type A, Plug and Play	Shipping Infor	Shipping Information	
DLC Qualified:	Lifespan:		Case Qty:	
Yes	50,000-hour LED lifespan based on IES LM-70 result			
DLC Listed:	Construction	Case Dimensi	Case Dimensions:	
This product is on the Design Lights Consortium (DLC)	Operating Temperature:		37.2 x 7.87 x 7.28	
Qualified Products List and is eligible for rebates from DLC Member Utilities.	-20 - 40°C		Pallet Quantity of Pieces:	
DLC Product Code: PJZB5ZYW	Bare Lamp Illuminated Length (inches):	900		
Description	35.22"		Pallet Dimensions:	
Lamp Type:	MOL (inches):		49.21 x 39.37 x 48.82	
Linear T8	35.5"			
Bulb Type:				
T8				

T8-8-36G-835-DIR

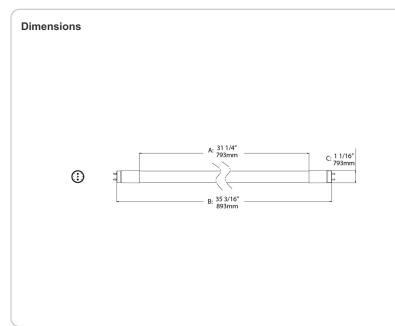

Features

Replacement for conventional Fluorescent T8 linear tubes

Plug and Play, no rewiring, no tools, no instructions

Compatible with most commercial ballasts, refer to our published compatibility guide

Suitable for use in enclosed and open fixtures

Approximately 40% More Energy Efficient that Standard T8 Lamps

Start up instantly, no flicker or hum like conventional fluorescent tubes

Environmentally friendly, no mercury used and are easy to recycle