



Replace conventional T5/T8/T12 fluorescent tubes. Double-ended line voltage wiring. Works with shunted and non-shunted sockets - no need to change sockets.

Color: White

Weight: 0.3 lbs

|                     |              |
|---------------------|--------------|
| <b>Project:</b>     | <b>Type:</b> |
| <b>Prepared By:</b> | <b>Date:</b> |

| Driver Info     |                       | LED Info       |          |
|-----------------|-----------------------|----------------|----------|
| Watts:          | 9W                    | Input Voltage: | 120-277V |
| Color Temp:     | 3500K (Neutral White) | Power Factor:  | 0.9      |
| Lumens:         | 1,100                 | Flicker:       | N/A      |
| Efficacy:       | 122 LPW               | THDi:          | <20%     |
| Color Accuracy: | 82 CRI                |                |          |
| L70 Accuracy:   | 50,000                |                |          |

## Technical Specifications

### Listings

**UL Recognized:**

Yes

**UL Classified:**

Yes

**NSF:**

Complies with NSF

**FCC:**

Yes

**Rohs:**

Yes

**CEC Status:**

Lawful for sale in California

**DLC Qualified:**

Yes

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.  
DLC Product Code: P47J6LPI

**Description**

**Lamp Type:**

Linear T8

**Bulb Type:**

T8

**Base Type:**

G13, Medium Bipin

**Dimmable:**

No

**Length:**

2ft

**Material:**

Glass

**LED Characteristics**

**Installation Type:**

Type B, Ballast Bypass, Double Ended Wire

**Lifespan:**

50,000-hour LED lifespan based on IES LM-70 results

**Construction**

**Operating Temperature:**

-20 - 40°C

**MOL (inches):**

23.78"

**MOD (inches):**

1.02"

**Other**

**Equivalent:**

17W Fluorescent T8

**Warranty:**

5 years

**Optical**

**Beam Angle:**

240°

**Shipping Information**

**Case Qty:**

25

**Case Dimensions:**

25 x 6.3 x 6.5


**Pallet Quantity of Pieces:**

2100

**Pallet Dimensions:**

49.21 x 39.37 x 50.2

## Dimensions

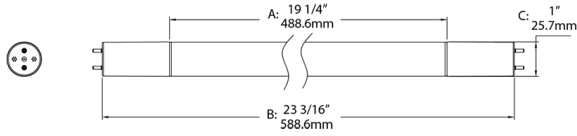

## Features

- Internal Driver eliminates the need for external ballasts or drivers
- Can be wired either using Single Ended or Double Ended wiring method for maximum flexibility in the field and simplifies stocking multiple skus
- Suitable for use in enclosed and open fixtures
- Approximately 40% More Energy Efficient than Standard T8 Lamps
- Start up instantly, no flicker or hum like conventional fluorescent tubes
- Environmentally friendly, no mercury used and are easy to recycle