

Replace conventional T8/T12 fluorescent tubes. Capable of single- or double-ended wiring for maximum in-the-field flexibility.

Color: White Weight: 0.3 lbs

Project:	Туре:
Prepared By:	Date:

Flicker:

THDi:

Driver Info

LED Info

Watts: 9W
Color Temp: 3500K (Neutral White)

Lumens: 1,100 Efficacy: 122 LPW

Color 82 CRI Accuracy: L70 Accuracy: 50,000

Input Voltage: 120-277V Power Factor: 0.9

0.9 N/A <20%

Technical Specifications

Listings

UL Recognized:

Yes

UL Classified:

Yes Rohs:

Yes

CEC Status:

Lawful for sale in California

DLC Qualified:

Yes

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC Product Code: PTNK0MM7

Description

Lamp Type: Linear T8

Bulb Type:

Т8

Base Type:

G13, Medium Bipin

Dimmable:

No

Length:

2ft Material:

0.1

Glass

LED Characteristics

Installation Type:

Type B, Bypass Balllast, Single + Double Ended Wire

_ifespan:

50,000-hour LED lifespan based on IES LM-70 results

Construction

Operating Temperature:

-20 - 40°C

MOL (inches):

23.78"

MOD (inches):

1.02" **Other**

Other

Equivalent:

17W Fluorescent T8
Warranty:

5 years
Optical

Beam Angle:

240°

Shipping Information

Case Qty:

25

Case Dimensions:


25 x 6.3 x 6.5

Pallet Quantity of Pieces:

2100

Pallet Dimensions:

49.21 x 39.37 x 50.2

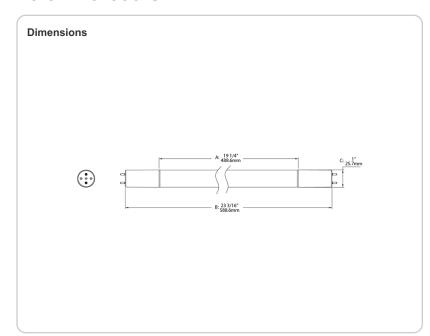

Features

Replacement for conventional Fluorescent T8 or T12 linear tubes

Internal Driver eliminates the need for external ballasts or drivers

Can be wired either using Single Ended or Double Ended wiring method for maximum flexibility in the field and simplifies stocking multiple skus

Suitable for use in enclosed and open fixtures

Approximately 40% More Energy Efficient that Standard T8 Lamps

Start up instantly, no flicker or hum like conventional fluorescent tubes

Environmentally friendly, no mercury used and are easy to recycle